
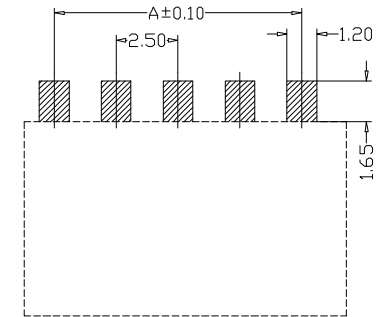


Specifications:

Current Rating:1.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:30m ohm Max
 Withstanding Resistance:1000M ohm
 Withstanding Voltage:500V AC/Minute
 Temperature Range :-25° ~ +125°

Material:

Contact Material:Copper Alloy
 Plastic Material:High Temp Plastic UL94V-0
 Plastic Color:Black
 Finish:Gold Plated

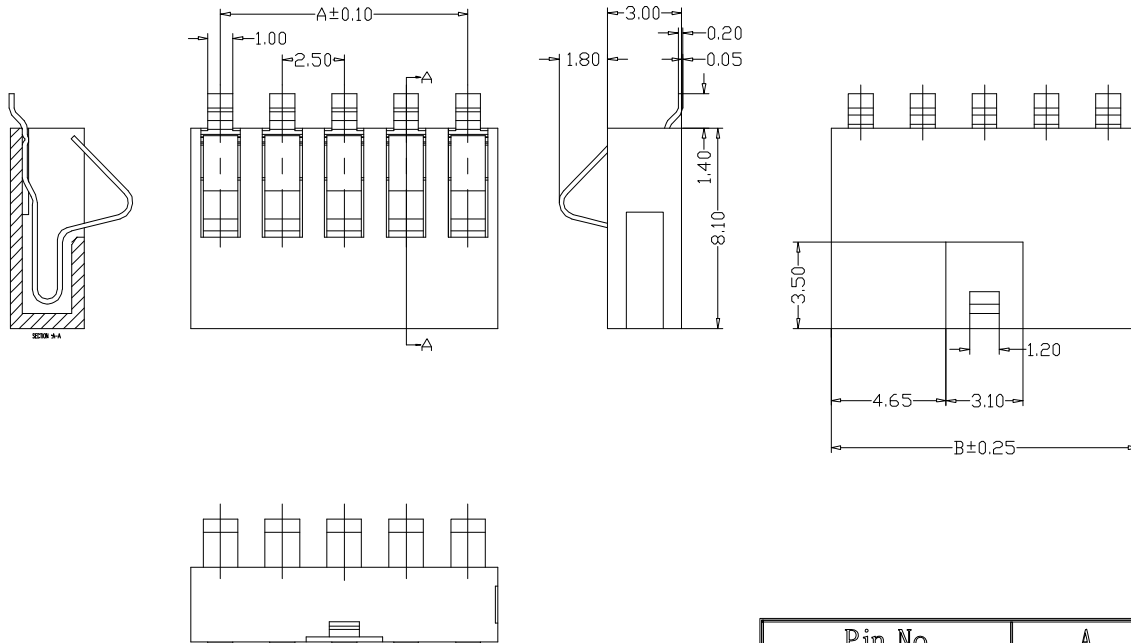

Pin No.	A	B
BCS25-V30X-02	2.50	4.90
BCS25-V30X-03	5.00	7.40
BCS25-V30X-04	7.50	9.90
BCS25-V30X-05	10.00	12.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

BCS25-V30X-xx-LF

SERIES

LEADFREE

02-05WAY

NON POST

HIGH 3.0mm

180°SMT

DESCRIPTION: