

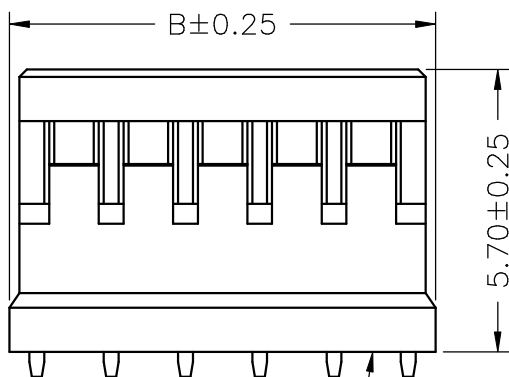
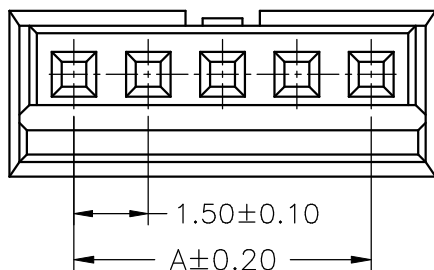
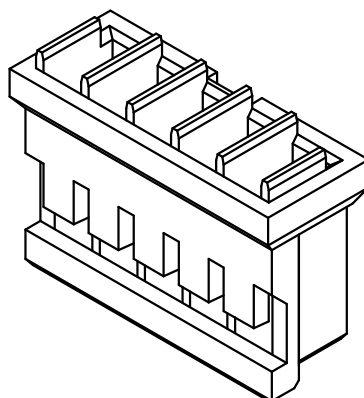


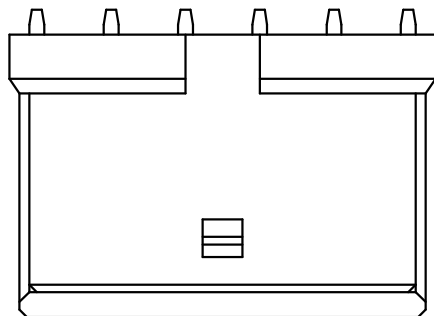

Circuit 1

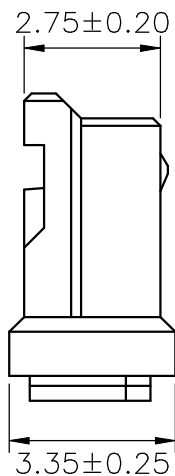

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ZHQ-H-02	1.50	4.10
ZHQ-H-03	3.00	5.60
ZHQ-H-04	4.50	7.10
ZHQ-H-05	6.00	8.60
ZHQ-H-06	7.50	10.10
ZHQ-H-07	9.00	11.60
ZHQ-H-08	10.50	13.10
ZHQ-H-09	12.00	14.60
ZHQ-H-10	13.50	16.10
ZHQ-H-11	15.00	17.60
ZHQ-H-12	16.50	19.10
ZHQ-H-13	18.00	20.60
ZHQ-H-14	19.50	22.10
ZHQ-H-15	21.00	23.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ZHQ-H-xx-LF
SERIES | LEADFREE
02-15WAY
HOUSING

DESCRIPTION: 1.50mm PITCH HOUSING