

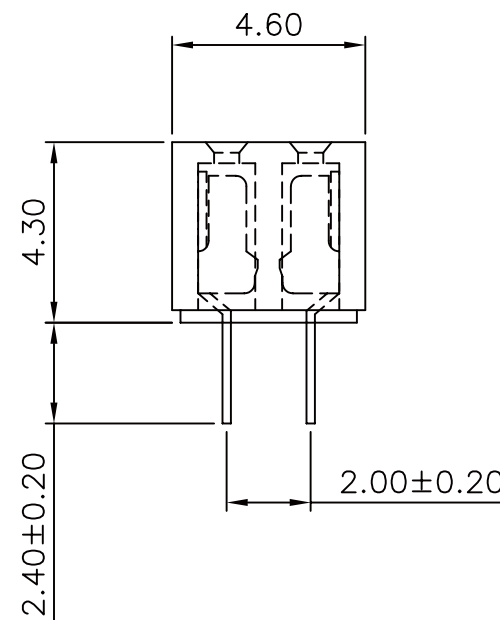
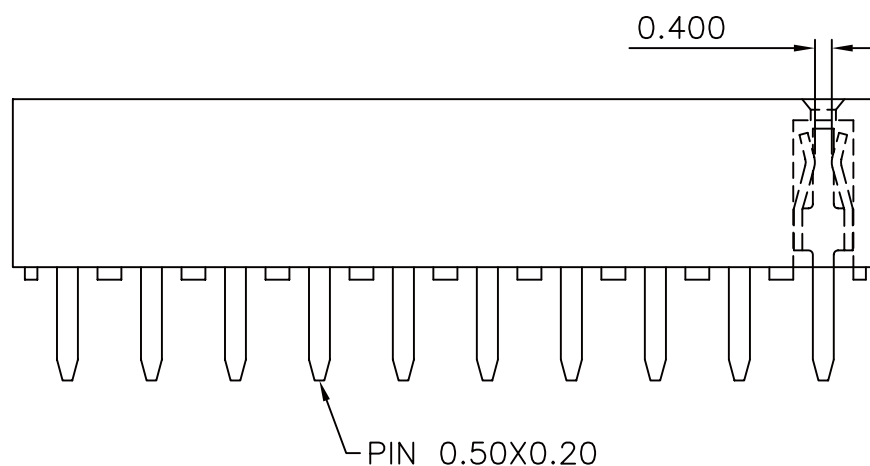


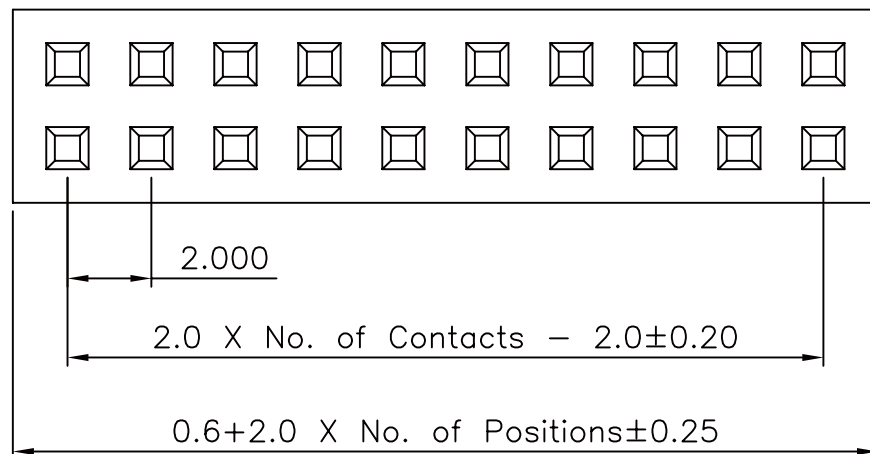

Recommended P.C.Board
Hole Layout

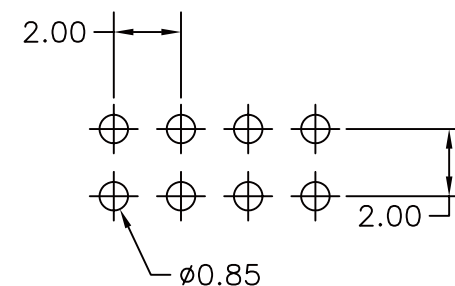

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
Nylon-6T

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION



ORDER INFORMATION

S-D43-2Xxx-LF
SERIES LEADFREE
2X03:06WAY
2X40:80WAY
HIGH 4.3mm
DIP 180°

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROW DIP TYPE BASE 4.30