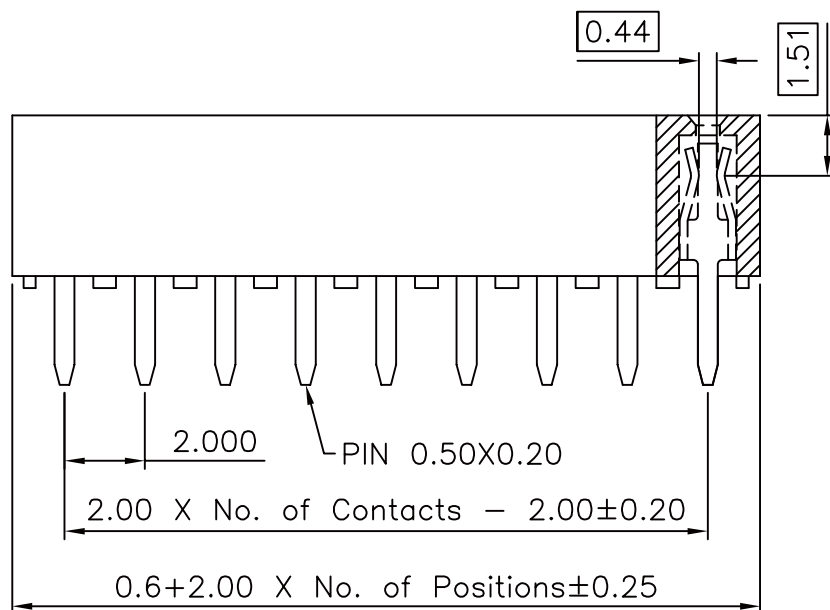



Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC

Contact Resistance: 20mΩ Max.


Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
Nylon-6T

Recommended P.C.Board Hole Layout



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

S-D43-1Xxx-LF
SERIES
LEADFREE
1X02:02WAY
1X40:40WAY
HIGH 4.3mm
DIP 180°

DESCRIPTION: 2.00 FEMALE HEADER SINGLE ROW DIP TYPE BASE 4.30H