

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC




Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
Nylon 6T

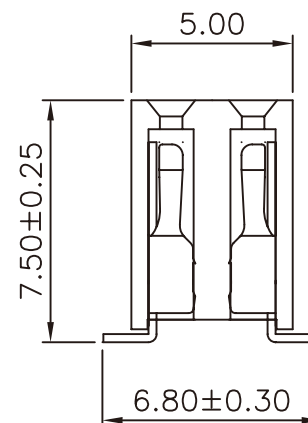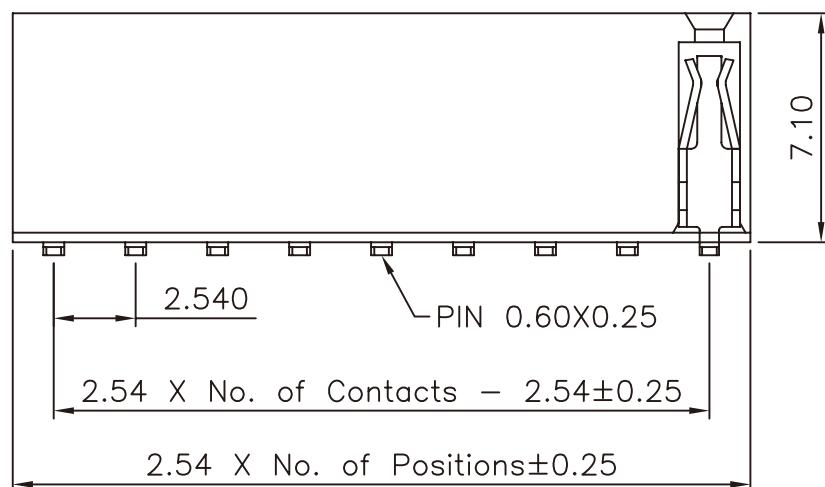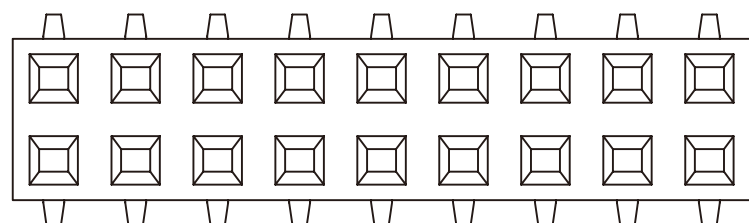

Recommended P.C.Board Layout

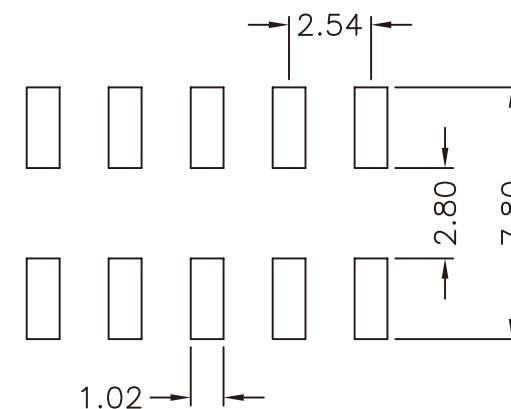

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

P PROJECTION



ORDER INFORMATION

F-V75X-2Xxx-LF
SERIES
LEADFREE
2X02:04WAY
2X40:80WAY
NON POST
HIGH 7.5mm
180°SMT

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROW SMT TYPE BASE 7.10