
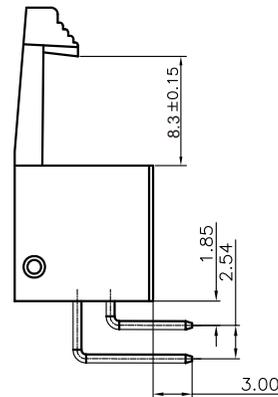


Specifications:


Current Rating:3.0A AC/DC
 Voltage Rating:250 AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:1,000M ohm. min.
 Dielectric Withstanding:600V AC/Minute
 Operating Temperature Range:-40°C ~ +105°C
 Materials:

Insulator:High Temp. Plastic (PBT UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating: **TIN**

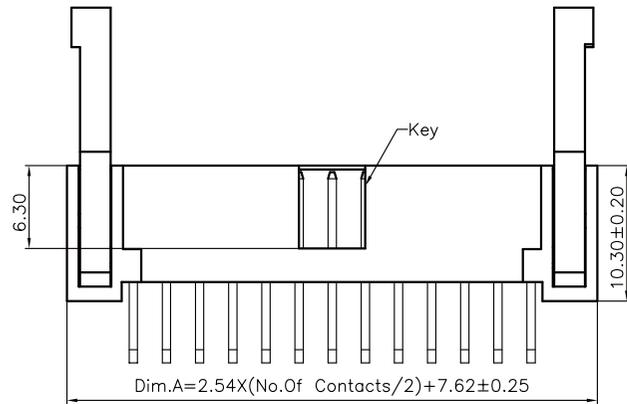

Dimension :

| Pos | Dim A | Dim B | Pos | Dim A | Dim B | Pos | Dim A | Dim B |
|-----|-------|-------|-----|-------|-------|-----|-------|-------|
| 6 | 15.24 | 5.08 | 16 | 27.94 | 17.78 | 34 | 50.80 | 40.64 |
| 8 | 17.78 | 7.62 | 20 | 33.02 | 22.86 | 40 | 58.42 | 48.26 |
| 10 | 20.32 | 10.16 | 24 | 38.10 | 27.94 | 50 | 71.12 | 60.96 |
| 12 | 22.86 | 12.70 | 26 | 40.64 | 30.48 | 60 | 83.82 | 73.66 |
| 14 | 25.40 | 15.24 | 30 | 45.72 | 35.56 | 64 | 88.90 | 78.74 |

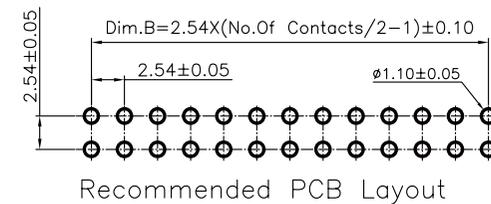

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司


www.morethanall.com

RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE
 SIZE A4 PPROJECTION

TOLERANCES ARE

X. ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±



ORDER INFORMATION

FL-R-xx-LF
 SERIES | LEADFREE
 06-64WAY
 DIP 90°

DESCRIPTION: 2.54mm Box Header Right Angle Type