


PCB LAYOUT

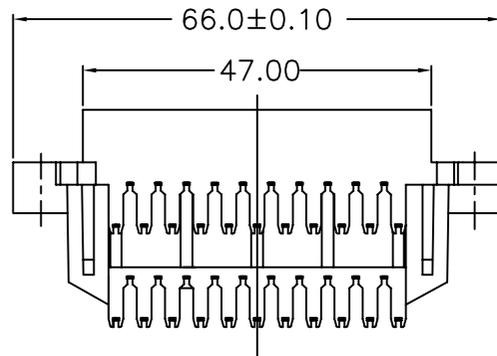

NOTES:

1.MATERIAL

- 1.1 Insulator:PC Or ABS
- 1.2 Contact: Brass
- 1.3 Contact Plated: Tin Plated

2.SPECIFICATION

- 2.1 Current Rate:1 Amps
- 2.2 Insulator Resistance:5000M Ohms Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55°C to+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X.±
.X±0.30
.XX±0.20
.XXX±
ANG±



ORDER INFORMATION

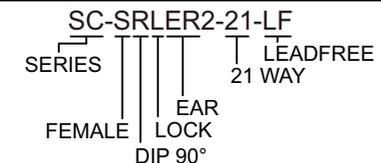

DESCRIPTION: 90度雙層母座分體式PC