
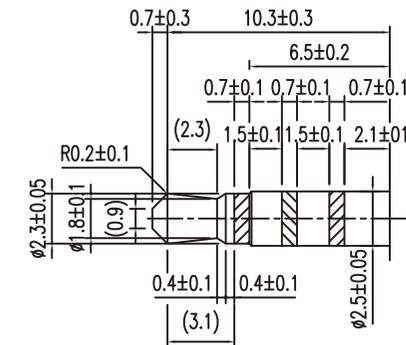


一般公差	
尺寸區分	公差
0>1.0	±0.1
1.0>6.0	±0.2
6.0>12.0	±0.3
12.0>25.0	±0.4
25.0>	±0.5

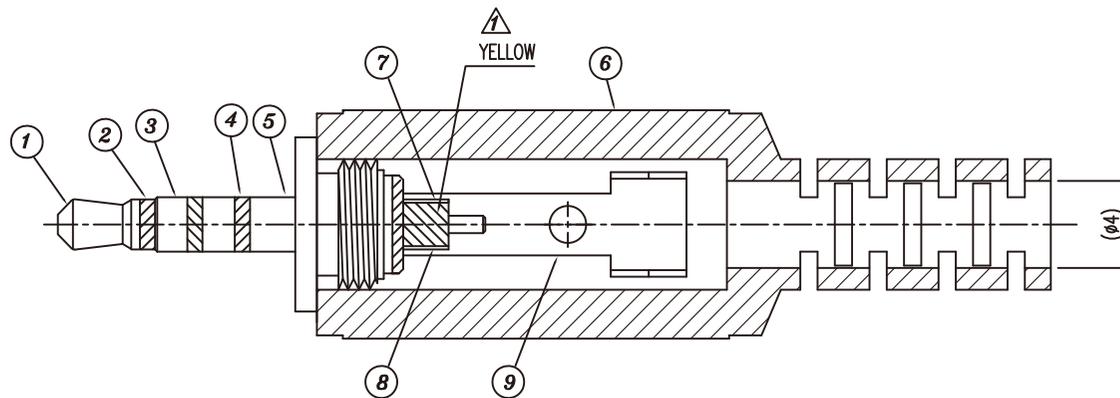

9	BRASS NICKEL
8	BRASS 2rd POLE NICKEL
7	BRASS 3rd POLE GOLD
6	TPR BLACK
5	BRASS NICKEL
4	POM BLACK
3	BRASS NICKEL
2	POM BLACK
1	BRASS NICKEL
NO	CONTENT

1. DIELECTRIC STRENGTH : AC 200V at 1 MIN
2. INSURATION RESISTANCE : DC 100V / 50MΩ MIN

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



ORDER INFORMATION

EP-A-04-LF  
SERIES | LEADFREE  
| 04WAY  
ASSEMBLY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Ø2.5 PLUG 4-POLE (ASSEMBLY TYPE)