
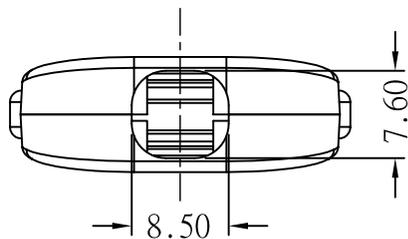
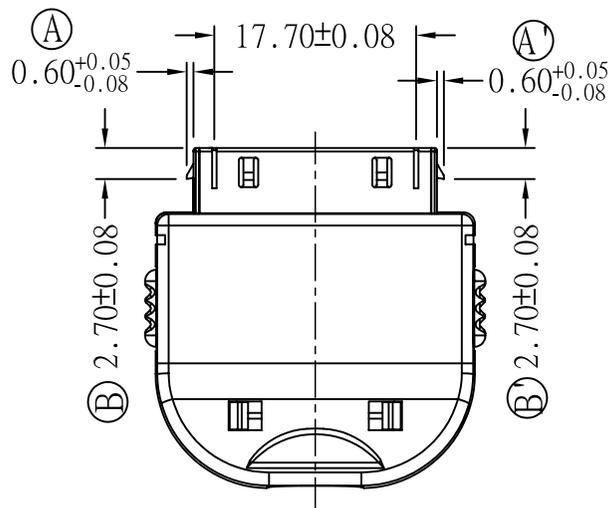
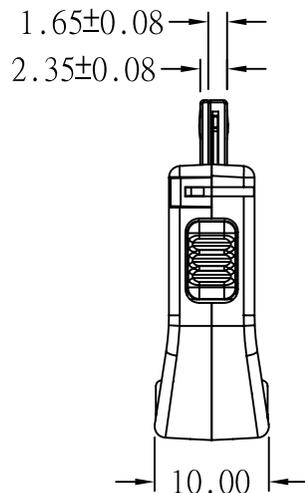


DETAIL-A SCALE 2.5:1

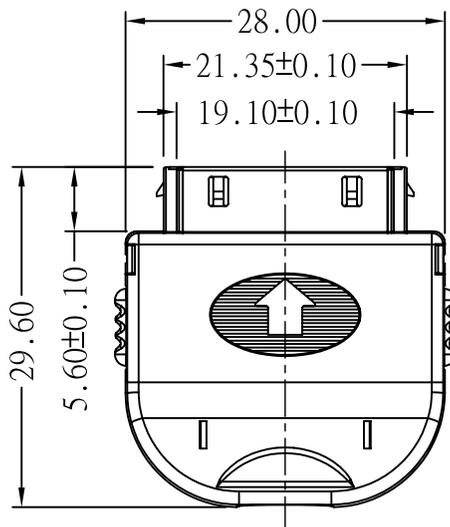

NOTE:

MATERIAL:
 UPPER COVER-ABS
 BOTTOM COVER-ABS
 BUSH BOTTOM-ABS
 HOUSING -PA66+30%纖維
 BACK SHIELD-SUS301/T=0.40mm
 FRONT SHIELD-SUS301/T=0.20mm
 TEMINAL-JIS C5210/T=0.20mm
 TEMINAL PLATING:
 50~80U" Ni UNDER PLATE A11 OVER.
 80~100U" Sn IN TAIL AREA.
 Min 2~3U"GOLD PLATED IN CONTACT AREA
 ELECTRICAL
 CURRENT RATING:0.5A
 DIELECTRIC WITHSTANDING VOLTAGE:300VAC
 INSULATION RESISTANCE:100MΩ /1000VDC
 CONTACT RESISTANCE:80mΩ
 ENVIRONMENTAL
 OPERATING TEMPERATURE:-10°C TO 60°C
 STORAGE TEMPERATURE:-30°C TO 60°C

NO.	PAPT NO.	NAME	MATERIAL	COLOR	QTY
1	SAPD-IPD02*	I POD-30P-2 CONNECT HOUSING	/	/	1PCS
2	CAA-0839-BKA	I POD-30P-2 UPPER COVER	ABS	BLACK	1PCS
3	CAA-0840-BKA	I POD-30P-2 BOTTOM COVER	ABS	BLACK	1PCS
4	CAA-0841-BKA	I POD-30P-2 PUSH BUTTON	ABS	BLACK	2PCS
5	SEE-0242-Y*A	I POD-30P-2 FRONT SHIELD	SUS301	/	1PCS
6	SEE-0243-Y*A	I POD-30P-2 BACK SHIELD	SUS301	/	1PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4 PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

IPD-PSQBK-30-LF
 SERIES | | | LEADFREE
 | | | 30 WAY
 | | | BLACK
 | | | Q TYPE COVER
 | | | SOLDER
 | | | PLUG

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: