
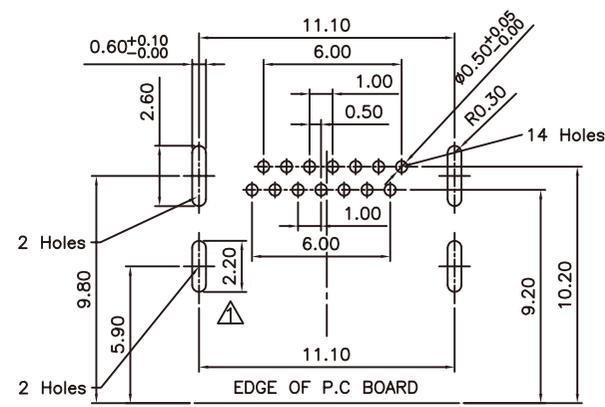
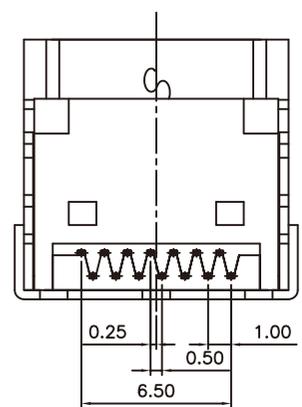
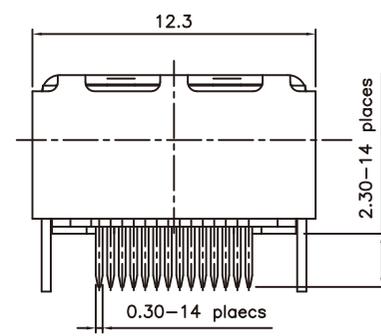
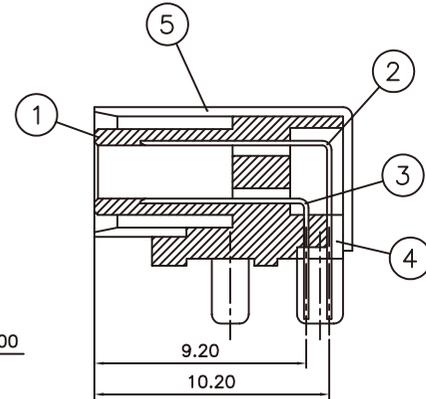



ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	NYLON 6T+G.F	UL-94V-0(Black)
2	CONTACT-L	7	Phosphor Bronze	Gold flash selective lead free
3	CONTACT-S	7	Phosphor Bronze	Gold flash selective lead free
4	BASE	1	P.B.T+G.F	UL-94V-0(Black)
5	SHELL	1	Brass	Tin alloy plated lead free

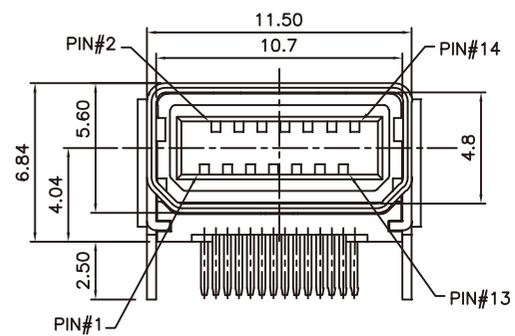


**SPECIFICATION**  
**MATERIAL**  
 See drawing  
**STANDARD DATA**  
 Rating current:0.5A  
 Operating temperature: -30°C ~ +60°C  
 Storage temperature: -40°C ~ +85°C  
**ELECTRICAL**  
 Insulator resistance: 1000M ohms Min. @ 250 VDC  
 Withstanding voltage: 100 VAC / minute  
 Contact resistance: 60 m ohms Max.

**RoHS Compliant**

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



**ORDER INFORMATION**

**MVGA-SRM-14-LF**  
 SERIES | | | | LEADFREE  
 | | | | 14WAY  
 | | | | METAL  
 | | | | DIP 90°  
 | | | | FEMALE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

DESCRIPTION: CONNECTOR (Pitch:0.5mm) Right angle type-14 position