


Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

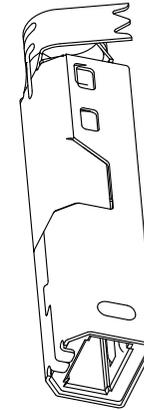

4	Back-shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
3	Front-shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
2	Contact	4	Brass	T=0.20mm	Contact area:0.8u"min Gold Plated over 40u"Nickel min. Solder area:80u"min.Tin Plated over 40u"Nickel min.
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°



ORDER INFORMATION

USB-PSxx-4B-LF  
SERIES | LEADFREE  
4 PIN B TYPE  
BK:BLACK  
WH:WHITE  
SOLDER  
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: USB-B(M) SOLDER