

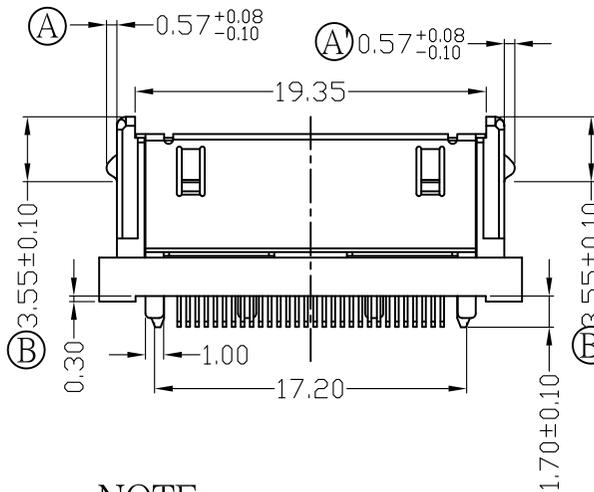
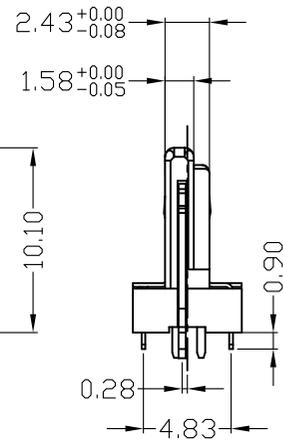
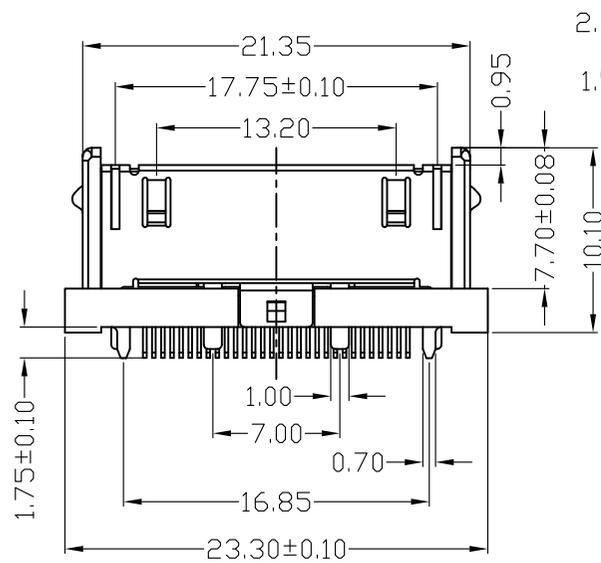


NO.	NAME	MATERIAL	CLCLR	QTY
1	HOUSING	SEE NOTE:3.		1PCS
2	SHIELD	SUS301	SEE NOTE:3.	1PCS
3	LATCH			2PCS
4	I-Pod-30Pin 插板 TERMINAL-R	C5210		15PCS
5	I-Pod-30Pin 插板 TERMINAL-L		15PCS	

PA46無鹵 黑色  
 C5210 Ni Min50u"/Sn Min100u"/Au1-3U";  
 卡勾SUS301·Ni Min50u"/鐵殼SUS301;



NOTE:  
 1. ELECTRICAL  
 CURRENT RATING:0.5A  
 DIELECTRIC WITHSTANDING VOLTAGE:300VAC  
 INSULATION RESISTANCE:100MΩ /1000VDC  
 CONTACT RESISTANCE:80mΩ  
 2. ENVIRONMENTAL  
 OPERATING TEMPERATURE:-15°C TO 85°C  
 STORAGE TEMPERATURE:-30°C TO 85°C

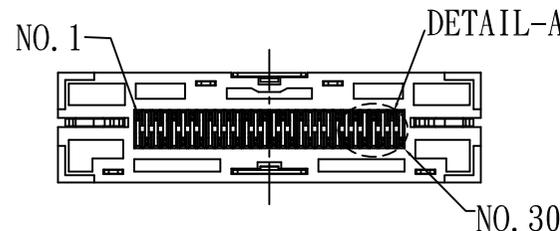

NOTE:  
 |A-A'| ≤ 0.08  
 |B-B'| ≤ 0.08


RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1:1  
 DATE  
 SIZE A4 PPROJECTION

X, ±  
 .X ± 0.40  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±



ORDER INFORMATION

IPD-PD-30-LF  
 SERIES LEADFREE  
 30 WAY  
 DIP 180°  
 PLUG

DESCRIPTION: