


SCREW A TYPE FOR LOCK INSULATOR (4 PCS)

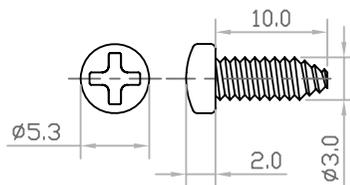

SCREW B TYPE FOR LOCK SR (2 PCS)

MECHANICAL

INSULATOR MATERIAL:

PBT & Glass-fibre reinforced
UL 94V-0, 1 Pcs

HOOD MATERIAL:

Aluminum, 1 Pcs

THUMSCREW MATERIAL:

Copper Alloy, 2 Pcs

SCREW FOR LOCK INSULATOR MATERIAL:

Steel, 4 Pcs

SCREW FOR LOCK SR MATERIAL:

Steel, 2 Pcs

WIRE SIZE:

AWG 24 or 26 or 28

ELECTRICAL

CURRENT RATING:

7 Amp

WITHSTANDING VOLTAGE:

AC 1200V Min. (for one minute)

INSULATION RESISTANCE:

1000MΩ Min.(at 500V DC)

CONTACT RESISTANCE:

10mΩ Max. mated

WORKING TEMPERATURE:

-55° C to +105° C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

X ± 0.30


.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ± 3°

PPOJECTION 



ORDER INFORMATION

V35-PHW-34-LF
SERIES | LEADFREE
34WAY
WHITE COVER
HOUSING
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: V.35 CONNECTOR MALE WITH PLASTIC SR WITHOUT PIN