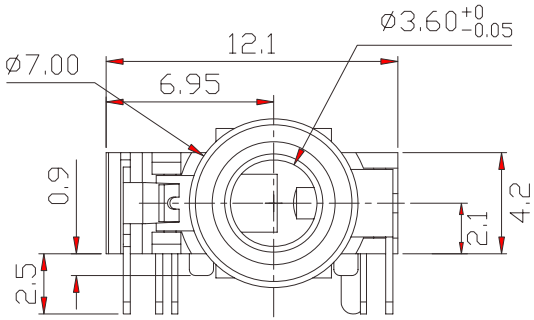

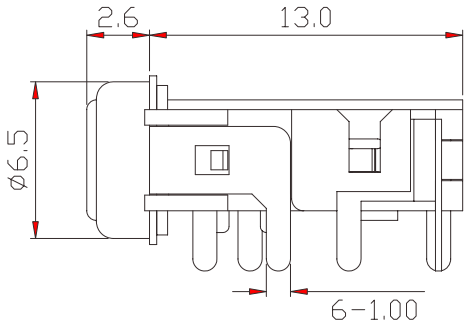

Specification:
Contact Resistance: 30m Ohm. Max At AC 100mA Max.1KHz.
Insulation Resistance: 100M Ohm Min. At 500V DC.
Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.
Dielectric Withstanding Voltage: 500V AC For 1 Minute.
Durability (Life Test): 1500 Cycles Minimun.
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0Kg.

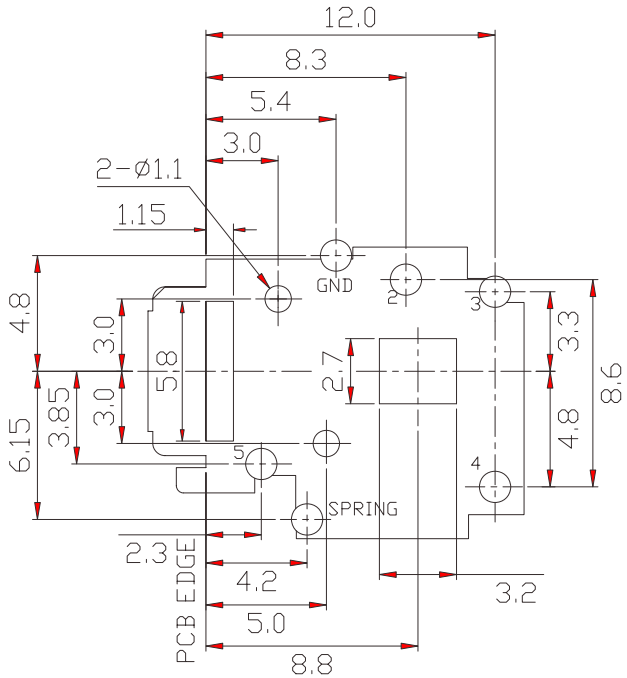

PCB LAYOUT
(BOTTOM VIEW)

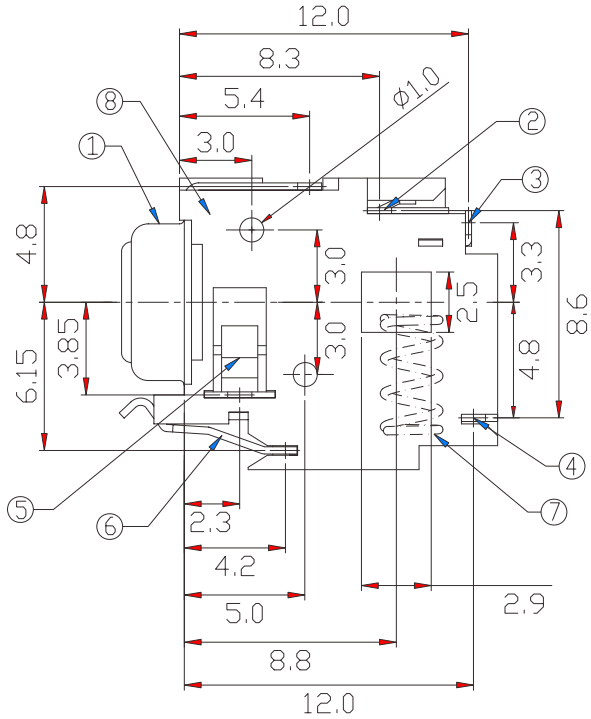



NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND PIN	BRASS T: 0.30	GOLD PLATED	1
2	RING SPRING	PBS T:0.25	TIN PLATED	1
3	TIP BREAK	PBS T:0.25	TIN PLATED	1
4	RING BREAK	PBS T:0.30	TIN PLATED	1
5	BUSHING	PBS T:0.25	TIN PLATED	1
6	SPRING	PBS T:0.30	TIN PLATED	1
7	SPRING	STAINLESS STEEL		1
8	HOUSING	NYLON PA9T	BLACK	1

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ± 0.38
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±



ORDER INFORMATION

PJ-R32-06-LF
SERIES
DIP 90°
POST 3.0+2.7mm
06 WAY
LEADFREE

DESCRIPTION: 3.5mm EARPHONE JACK FLAT 5 PIN DIP