
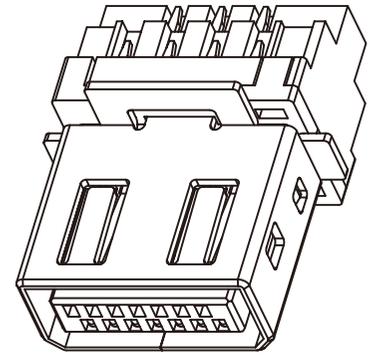


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	L.C.P+G.F	(Black)
2	CONTACT	14	Phosphor Bronze	Gold flash selective lead free
3	BASE	1	L.C.P+G.F	(Black)
4	SHELL	1	Copper alloy	lead free

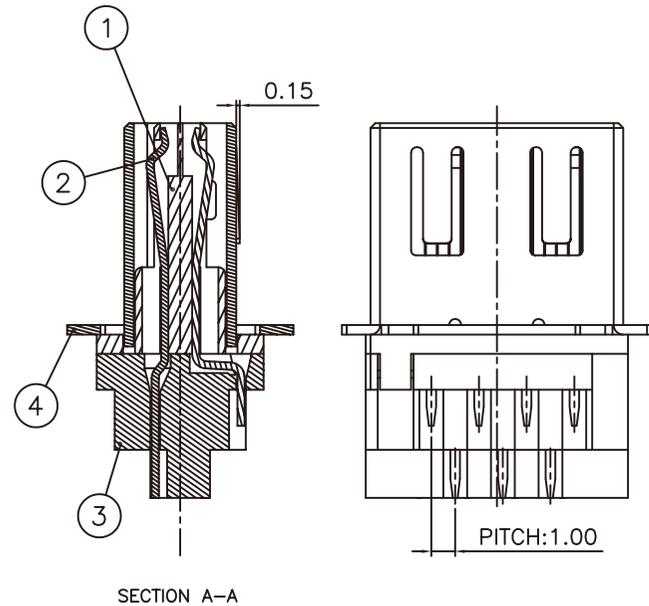

- NOTES
- MATERIAL: See drawing
 - ELECTRICAL
 - Insulator resistance: 1000M ohms Min. @ 250 VDC
 - Withstanding voltage: 100 VAC / minute
 - Contact resistance: 50m ohms Max.
 - MECHANICAL
 - Durability: 5000 cycles Min.
 - Contact retention force: 4.2N(0.43kgf) Min
 - PACKING: 500pcs/bag (reference)

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

PJECTION



ORDER INFORMATION

MVGA-PS-14-LF

SERIES | LEADFREE
14WAY
SOLDER
MALE

DESCRIPTION: CONNECTOR (Pitch:1.0mm) PLUG IN-14 position