


PCB LAYOUT

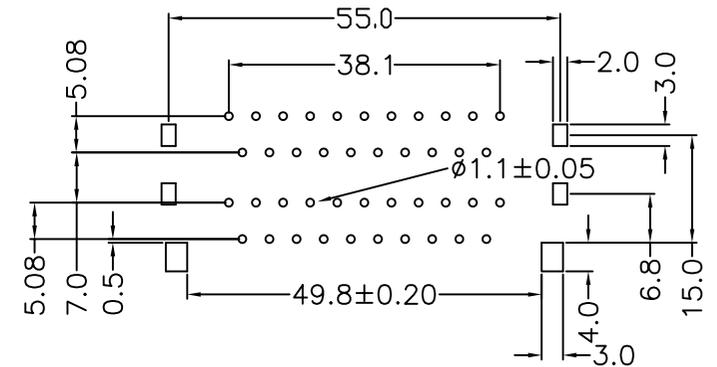

NOTES:

- 1.MATERIAL
  - 1.1 Insulator:PC Or ABS
  - 1.2 Contact: Brass
  - 1.3 Contact Plated: Tin Plated
- 2.SPECIFICATION
  - 2.1 Current Rate:1 Amps
  - 2.2 Insulator Resistance:5000M Ohms Min. at 500V DC
  - 2.3 Dielectric Strength:1000V Per minute
  - 2.4 Operation Temperature:-55°C to+105°C

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ±

PPOJECTION



ORDER INFORMATION

SC-SRLXQ-21-LF  
SERIES | LEADFREE  
21 WAY  
SQUARE  
NON HOLE  
FEMALE | LOCK  
DIP 90°

DESCRIPTION: 90度雙層母座分體式PC 加鐵殼