
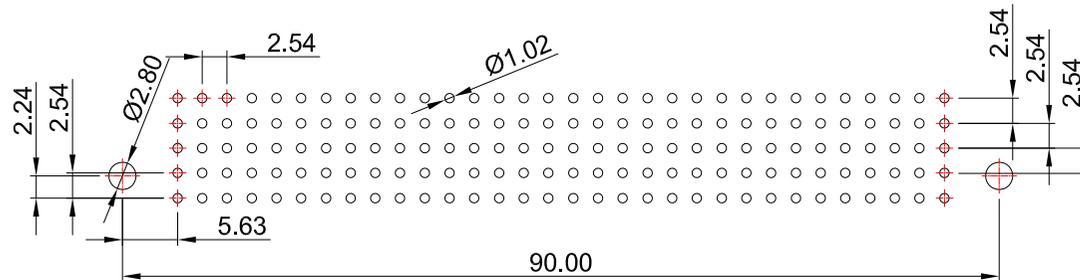
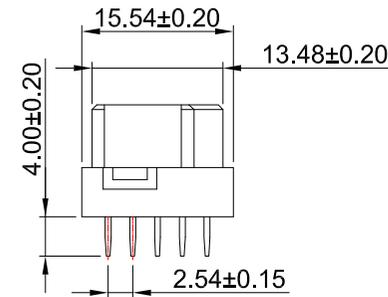


Notes:

1. Current Rating : 3.0A
2. Contact Resistance : 30mΩ Max.
3. Insulator Resistance : 3000MΩ Min / 100V DC
4. Withstanding Voltage : 1000V AC for 1 Minute.
5. Temperature Range : -55~+105°C

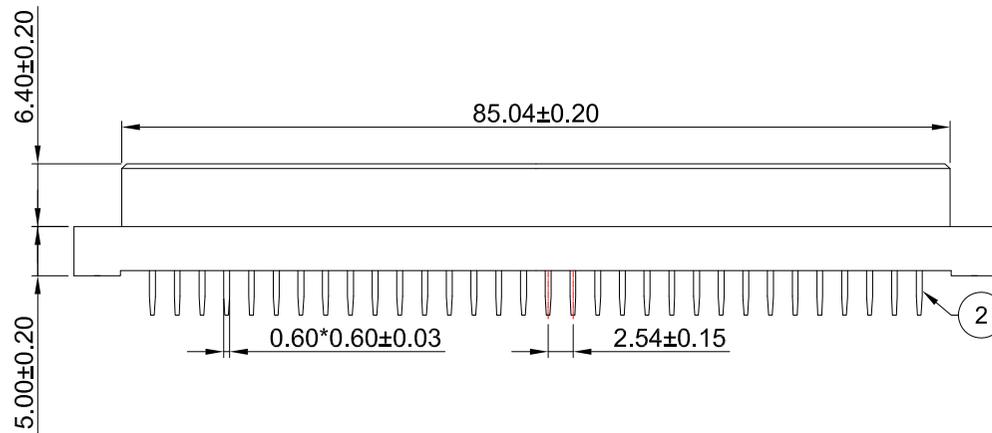

PCB LAYOUT

2	Contact	Brass	160
1	Housing	PBT UL 94V-0	1
No.	Part Name	Specifications	Qt'y

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

UE-SD-5X32-LF  
SERIES | LEADFREE  
DIP 180°  
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DIN41612 DIP Female Vertical Type