
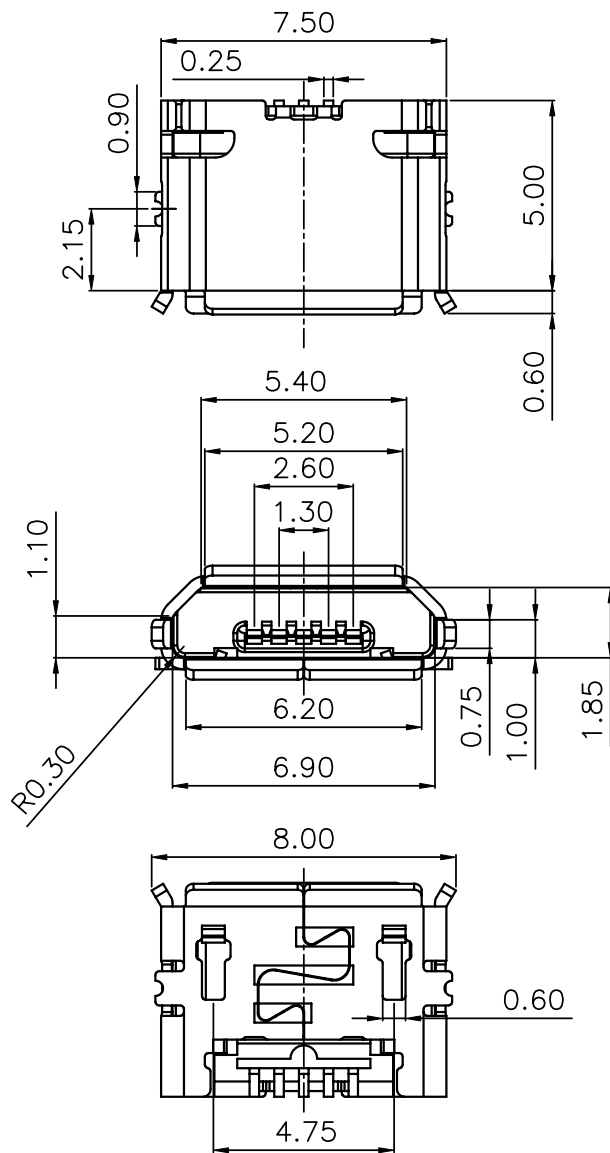


ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
1	SHELL	1	STAINLESS	20u" NICKEL, 100u" TIN
2	CONTACT	5	COPPER ALLOY	Gold flash Plating Over All 15u" Gold flash on Contact AREA
3	HOUSING	1	SYNTHETIC RESIN	(Black)

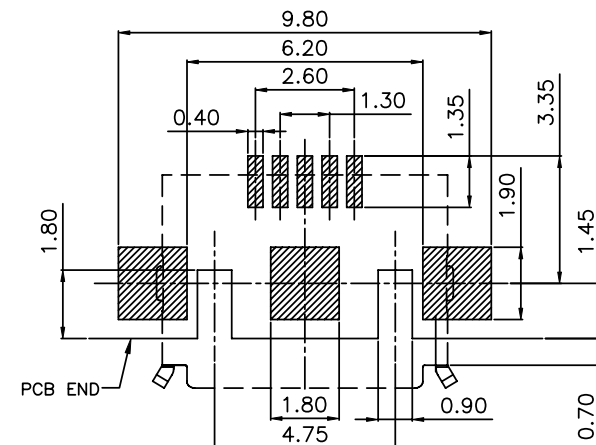

RECOMMENDED P.C. BOARD LAYOUT
(TOLERANCE: ±0.05mm)

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current: (1&5PIN) 2.0A; (2&3&4PIN) 0.5A Δ

Operating temperature: -30°C ~ +70°C

Storage temperature: -10°C ~ +60°C

ELECTRICAL

Insulator resistance: 100m ohms Min. @ 500 VDC

Withstanding voltage: 100 VAC / minute

Contact resistance: 60 m ohms

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 8N(0.81kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 2.1N(0.21kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.08
ANG ± 5°




ORDER INFORMATION



MISB-SWRVER-5B-LF

SERIES
FEMALE
90°SMT
LEADFREE
5 PIN B TYPE
REEL
EAR
REVERSED


DESCRIPTION:

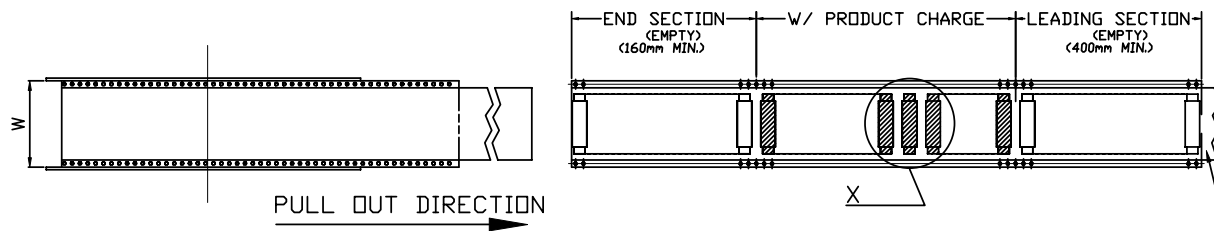

ITEM 項目	PARTS NAME 零件名稱	FINISH/REMARK 處理/備註
1	I/O CONNECTOR	20000 PCS/BOX
2	BOX	10PCS REEL/BOX
3	WATERPROOF BAG	1 PCS
4	REEL	2000PCS/REEL
5	COVER TAPE	Wide=16mm
6	CARRIER TAPE	14.5/REEL
7	LABEL	批號標籤

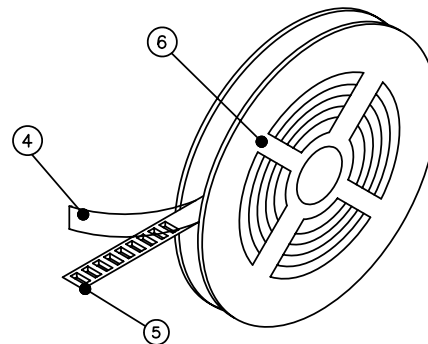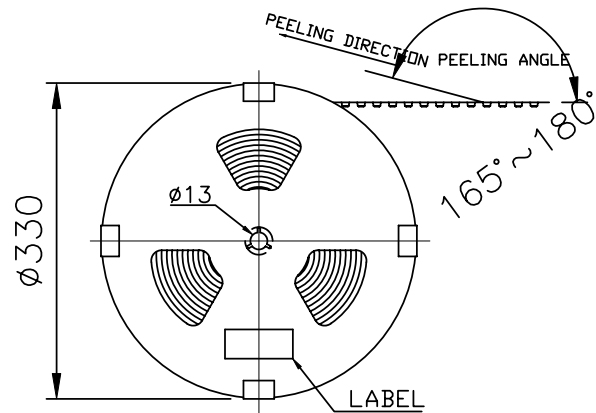


TOP COVER TAPE

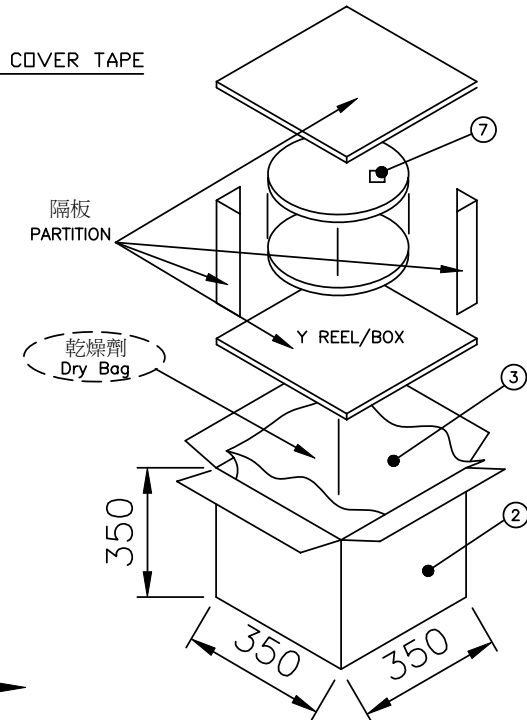

NOTES
1.MATERIAL: PS (Color: 黑色)
2.DEFORMATION(變形)&DAMAGE(損壞): NA.(不可)
3.All dimensions meet EIA-481-C requirements.

收料方向
CATHETER MATERIAL
DIRECTION

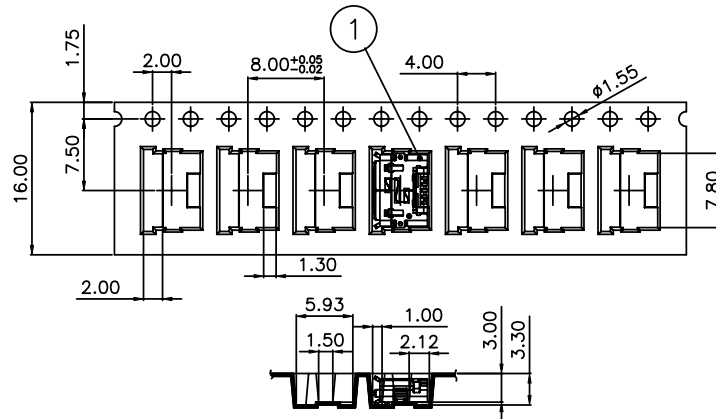

客戶放料方向
INPUT MATERIA
DIRECTION

SEC B-B

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.08
ANG ± 5°



ORDER INFORMATION

MISB-SWRVER-5B-LF

SERIES
FEMALE
90°SMT
LEADFREE
5 PIN B TYPE
REEL
EAR
REVERSED

DESCRIPTION: