
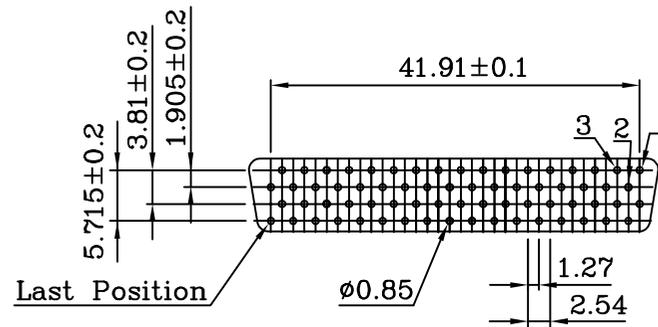

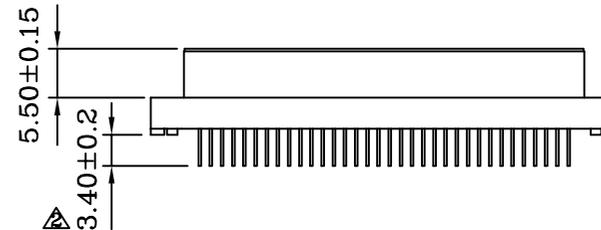


● **MATERIALS: (RoHS Compliant)**


Housing: Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts: Phosphor Bronze Gold
 Selective Plated

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +85°C

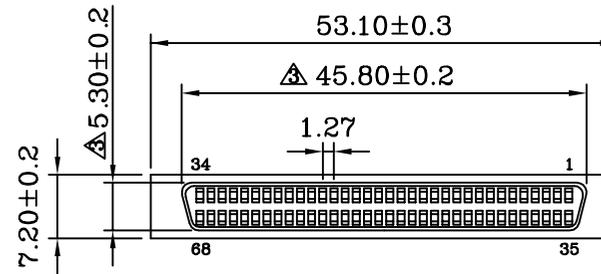

PCB Layout (B)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X.±
 .X±
 .XX±
 .XXX±
 ANG±

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

ORDER INFORMATION

HPDP-SD-068-LF
 SERIES | LEADFREE
 68 WAY
 DIP 180°
 FEMALE

DESCRIPTION: 1.27mm (.050") Pin Type 68Pos
 Receptacles Headers Vertical Mount Type (Unshielded)