

• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic Thermoplastic
P.B.T UL94V-0 Black

Contacts : Phosphor Bronze Gold
Selective Plated

• **ELECTRICAL CHARACTERISTICS:**



Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC







Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max



Operation Temperature: -55°C ~ +105°C

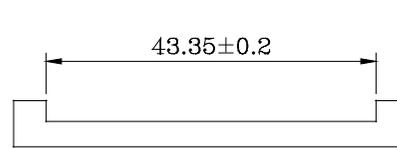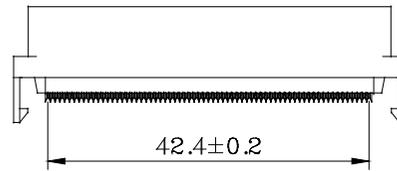

Cover

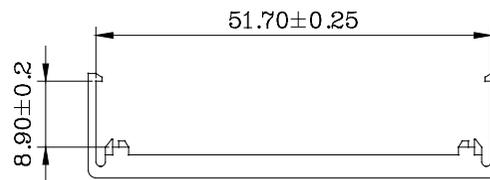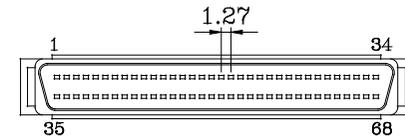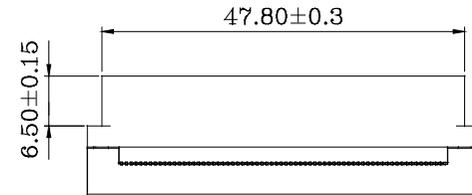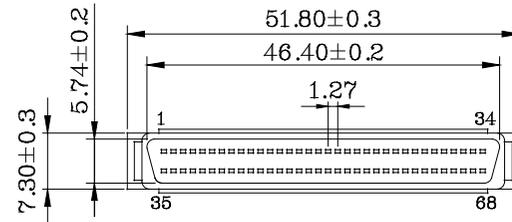

Strain Relief

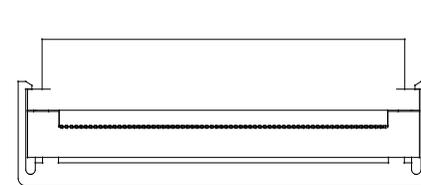

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG ±

PPOJECTION



ORDER INFORMATION

HPDP-PFS3-068-LF

SERIES | LEADFREE
68WAY
THREE TYPE
IDC 0.635mm
MALE

DESCRIPTION: 1.27mm (.050") Pin Type 68Pos
Plug Connector For 0.635(.025") Flat Ribbon Cable(Unshielded)