


MATERIAL :
 INSULATOR : PBT+30% GLASS FIBER (UL94V-0)
 CONTACT : PHOSPHOR BRONZE OR BRASS
 CONTACT PLATED : GOLD OR TIN OVER NICKEL

SPECIFICATION :
 CURRENT RATING : 1AMP.
 WITHSTANDING VOLTAGE : AC 500V R.M.S
 INSULATION RESISTANCE : 1000MEGOHMS MINIMUM
 AT DC 500V.
 CONTACT RESISTANCE : 15 MILLMIOHMS MAXIMUM.
 OPERATING TEMPERATURE ; -40°C~105°C.

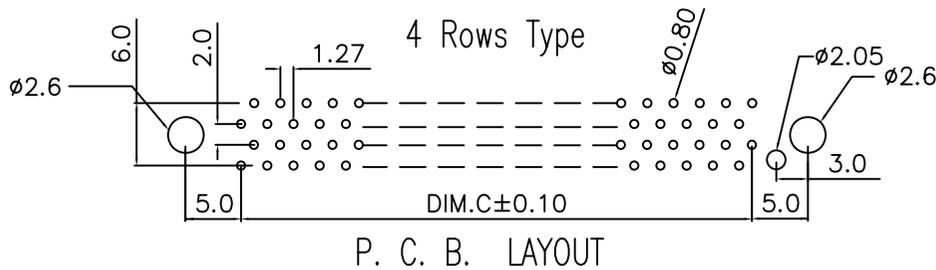

PIN	A	B	C	D
20	24.15	19.73	11.43	12.43
40	36.85	32.43	24.13	34.13
50	43.2	38.78	30.48	40.48
68	54.63	50.21	41.91	51.91
80	62.25	57.83	49.53	59.53

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

HPCP-PDPZ-xxx-LF
 SERIES | | | LEADFREE
 | | | 020~080WAY
 | | | CLIP
 | | | POST
 | | | DIP 180°
 | | | MALE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com