
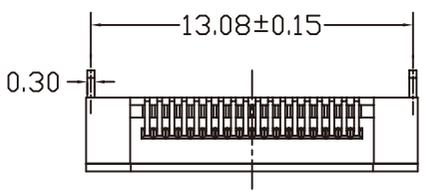
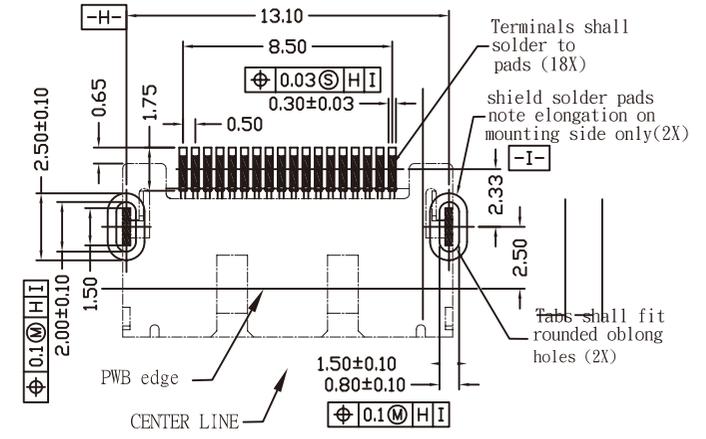
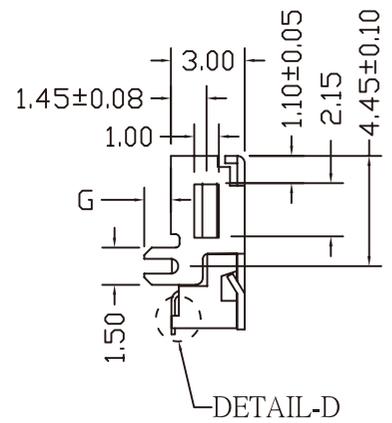


NOTES:
 1. ELECTRICAL
 CURRENT RATING:0.5A
 DIELECTRIC WITHSTANDING VOLTAGE:300VAC
 INSULATION RESISTANCE:100MΩ /1000VDC
 CONTACT RESISTANCE:80mΩ
 2. ENVIRONMENTAL
 OPERATING TEMPERATURE:-10°C TO 60°C
 STORAGE TEMPERATURE:-30°C TO 60°C

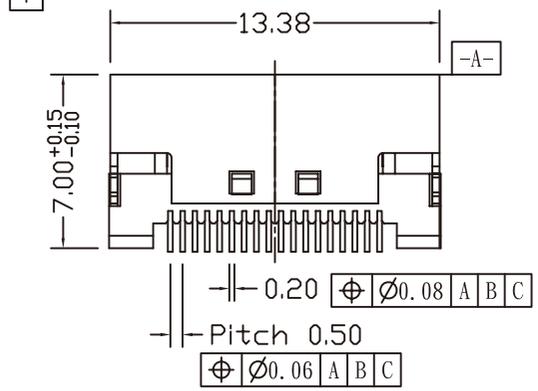

NOTE:

G	1	0.70±0.05
	2	0.90±0.05

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1


.XXX, ±

DATE

ANG, ±

SIZE A4

PPOJECTION



ORDER INFORMATION

CPSAM-JW-18-LF

SERIES | LEADFREE
 18 WAY
 90°SMT
 JACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: