

MATERIALS

1. HOUSING : PBT+25%
2. TERMINAL : BRASS, GOLD/TIN PLATED
3. FRONT SHIELD : SPCC, NICKEL PLATED
4. BACK SHIELD : SPCC, TIN PLATED

SPECIFICATION:

1. CURRENT RATING: 1.5AMP. MAX
2. DIELECTRIC WITHSTANDING VOLTAGE: AC 500Vmin R.M.S.
3. INSULATION RESISTANCE: 1000MV MIN. AT 500V DC
4. CONTACT RESISTANCE: 20mV MAX
5. OPERATING TEMPERATURE: 0°C TO +85°C
6. MAX. PROCESSING TEMPERATURE:
230°C FOR 30~60 SECONDS (HI.-TEMP. PLASTIC)

PART NO.	PLATING	COLOR
DVI-PS-24+1	GOLD(3u') OR TIN PLATED	WHITE

NOTE:

THE 14PIN HIGHEST SHORT 0.76m/m OTHER PIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.20

CHECKED BY GENIUS

.XX ± 0.10

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE


ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

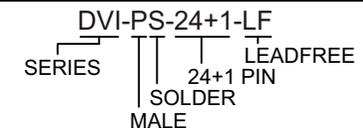

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DVI 24+1公半金白膠