

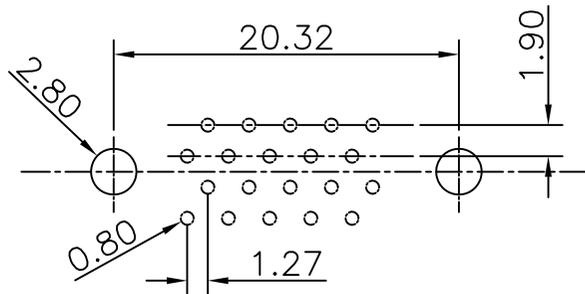
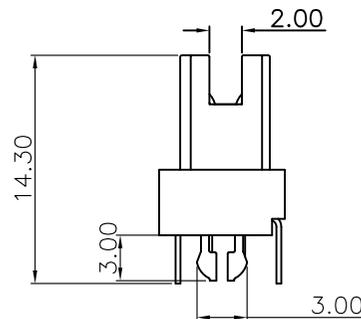


SECTION:A-A

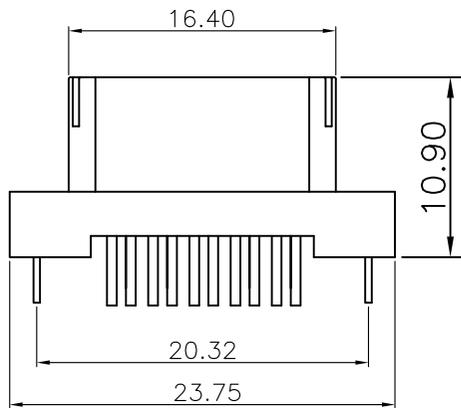

PCB LAYOUT: COMPONENT SIDE RECOMMENDED PCB THICKNESS:1.60mm

NOTE:  
 MATERIAL:  
 HOUSING:THERMOPLASTIC(NYLON+GF)UL 94V-0  
 CONTACT:PHOSPHOR BRONZE  
 PLATING:  
 CONTACT: GOLD PLATING  
 SPECIFICATION:  
 VOLTAGE RATING: 250V  
 CURRENT RATING: 1A  
 CONTACT RESISTANCE TERMINAL:30mΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC/MIN  
 INSULATION RESISTANCE:1000MΩ MIN

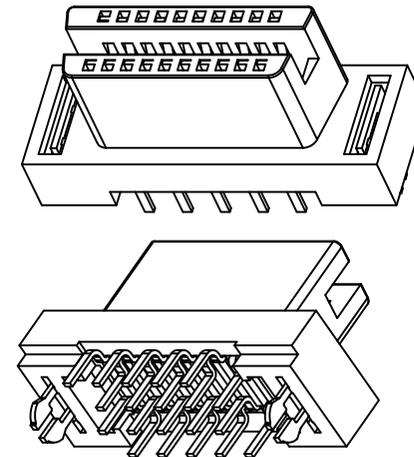

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X ± 0.30

CHECKED BY GENIUS

.XX ± 0.15

UNIT / mm

SCALE 1 : 1


.XXX ± 0.10

DATE

ANG ±

SIZE A4

PJECTION



ORDER INFORMATION

HPCP-SDZU-20-LF

SERIES | | | LEADFREE  
 20 WAY  
 U TYPE  
 FEMALE | CLIP  
 DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PITCH 1.27mm CARD EDGE 20PIN DIP