
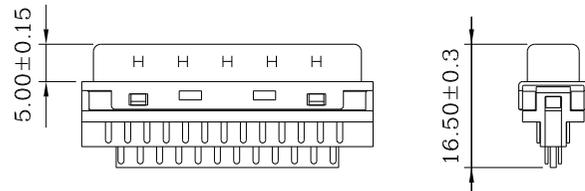
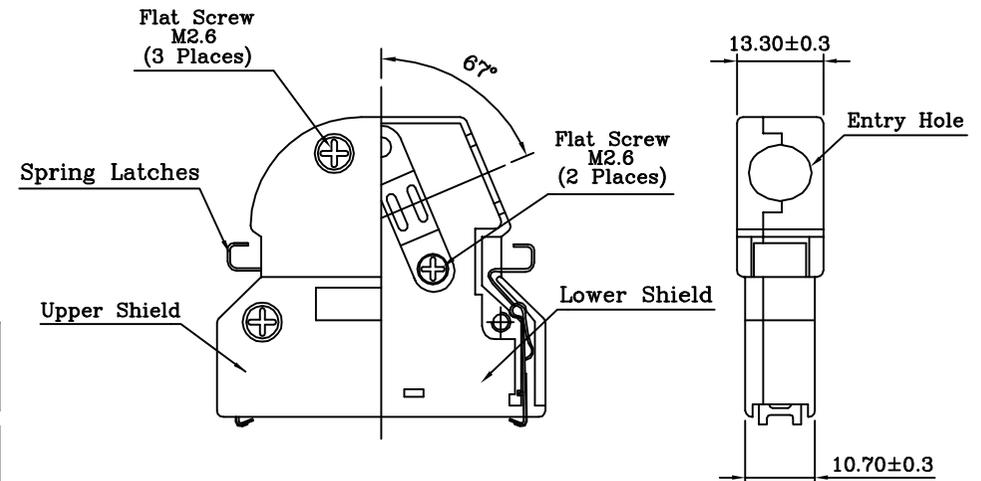
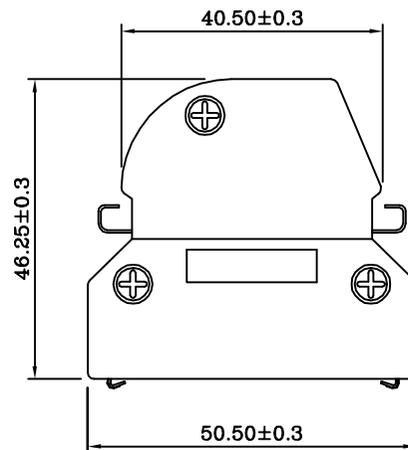
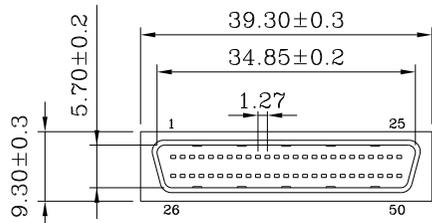


● **MATERIALS: (RoHS Compliant)**

Housing: Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts: Phosphor Bronze Gold
 Selective Plated
 Front Shell: Steel Nickel Plated
 Over Copper

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +85°C

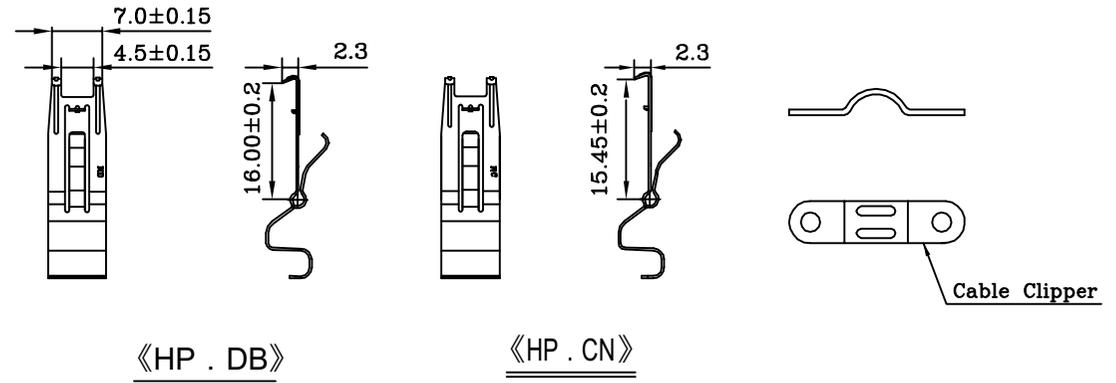

ENTRY HOLE SIZES:

9= (Ø9.0)
 11= (Ø11.0)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

HPD-PSWADxx-050-LF
 SERIES | 50 WAY | LEADFREE
 D09: DIA Ø9.0
 D11: DIA Ø11.0
 MALE SOLDER | SLANT W TYPE COVER

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 1.27mm (.050") Pin Type 50Pos Cable Plug Connector Solder Assembly Type