

備註/NOTE:

1. 安規/SAFETY:







- 1-1. Temperature rise: 0.3Aac/30Vac.
- 1-2. Insulation resistance: 500Vac/1min.
- 1-3. Dielectric withstanding voltage: 250Vac/0.5mA/1min.
- 1-4. Low level resistance: full scale voltage 20mV/current 10mA.
- 1-5. Durability: 12000cycles-200mm/min.

2. 材質/MATERIAL:

- 2-1 膠芯/HOUSING: LCP.
- 2-2 端子/PIN: 磷銅/PHOSPHOR BRONZE.
- 2-3 鐵殼/SHELL: 磷銅/PHOSPHOR BRONZE.

3. 電鍍/PLATING:

- 3-1 端子/PIN: GOLD 5u"  $\Delta$
- 3-2 鐵殼/SHELL: 霧錫/TIN.

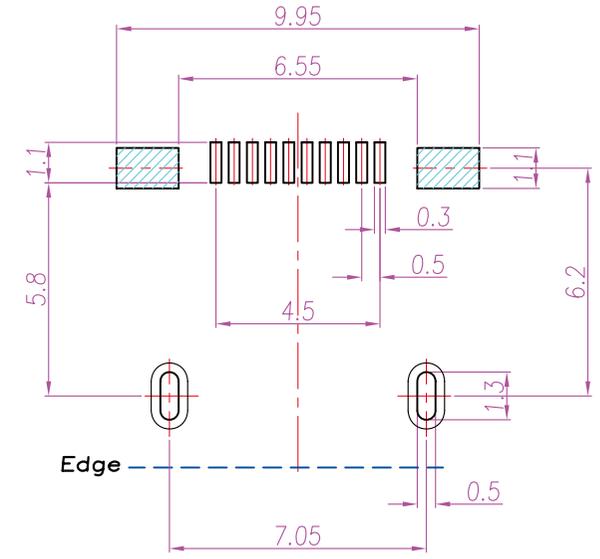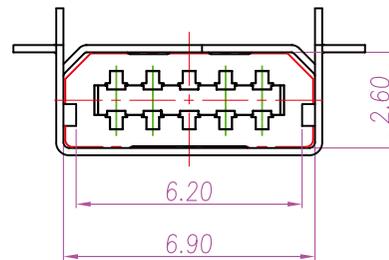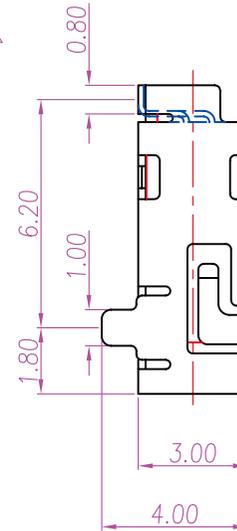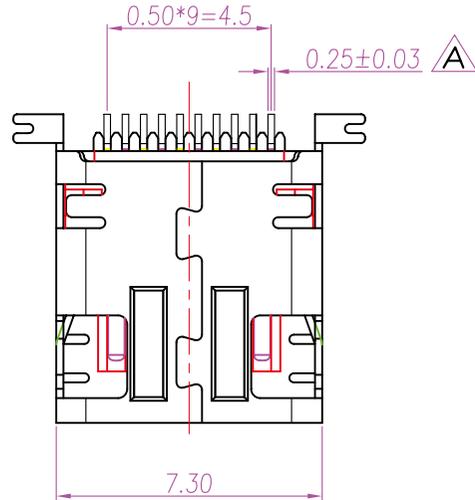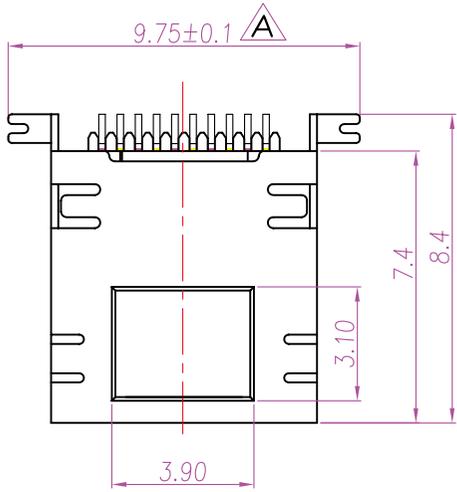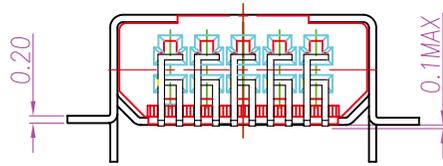

RECOMMEND P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



ORDER INFORMATION

MSB-SW-10D-LF  
SERIES | LEADFREE  
10 PIN D TYPE  
90°SMT  
FEMALE

DESCRIPTION: MiniUsb 10(F)板端SMT(鐵殼加深)