


ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C to +105°C.

Material

Contact: Copper Alloy.
 Insulator: PA6T,
 Shell: SPCC.
 Z-Piece: Copper Alloy.

RECOMMEND PCB LAYOUT

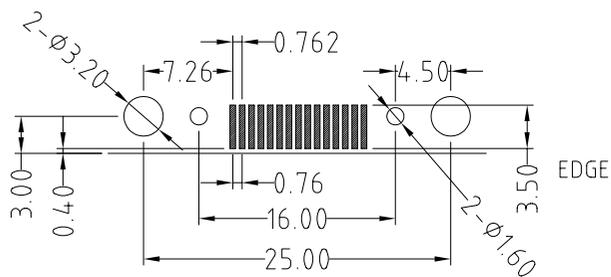

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

TOLERANCES ARE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

HDW-SNZ1-15-LF
 SERIES | CLIP | NUT | MALE
 LEADFREE
 15 WAY

DESCRIPTION: