

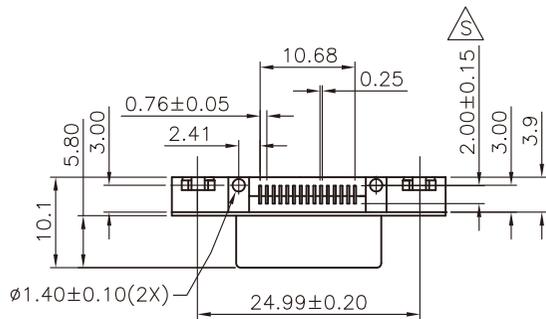
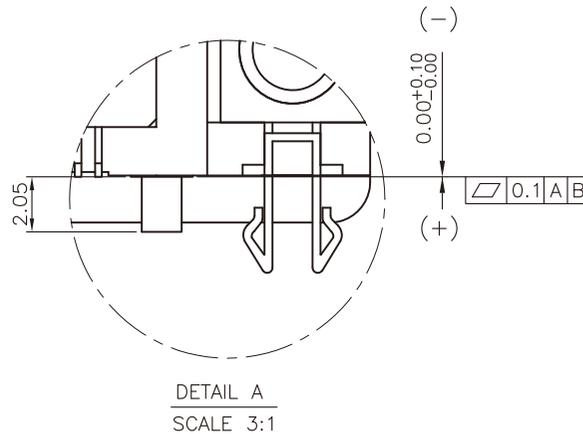


PIN NUMBER:
6 11 1 7 12 2 8 13 3 9 14 4 10 15 5

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05(TOP VIEW)

- NOTES:
1.MATERIAL:
HOUSING:HIGH TEMP THERMOPLASTIC,
UL94-0,COLOR:BLACK OR BLUE
TERMINAL:COPPER ALLOY
METAL SHELL:SPCC
BOARD LOCK & NUT:COPPER ALLOY
2.PLATING:
TERMINAL:
CONTACT AREA:SELECTIVE GOLD PLATING
SOLDER TAIL:TIN(Sn),THICKNESS=100 MICROINCH MIN.(2.54 MICROMETER MIN.)
UNDER PLATE:NICKEL(Ni),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
METAL SHELL:
NICKEL(Ni),THICKNESS=80 MICROINCH MIN.(2.032 MICROMETER MIN.)
UNDER PLATE:COPPER(Cu),THICKNESS=40 MICROINCH MIN.(1.016 MICROMETER MIN.)
BOARD LOCK:TIN(Sn),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
NUT:NICKEL(Ni),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
3.RECOMMENDED PCB THICKNESS:1.60±0.05mm
4.LEAD FREE & RoHS COMPLIANT PRODUCT

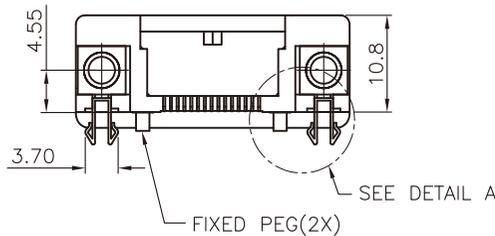

外 4#40 內 4#40

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PJECTION



ORDER INFORMATION

HDW-SNZ2H-15-LF
SERIES | | | | | T LEADFREE
15WAY
SCREW SEPARATELY
Z-BRACKET 2 CLIPS
NUT
FEMALE

DESCRIPTION: D SUBMINIATURE, R/A, SURFACE-MOUNT
LOW PROFILE 15 POSITION, FEMALE