

Note:

1. Material:

- 1.1 Insulator: LCP UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze, t=0.25mm.
- 1.3 Shell: C2680 or K7, t=0.4mm.

2. specification:

- 2.1 Current rating: 1A MAX.
- 2.2 Dielectric withstanding voltage: 500 v(ac) for minute.
- 2.3 Contact resistance: 30mΩ max.
- 2.4 Insulation resistance: 100 MΩ min at DC 30V.
- 2.5 Total mating force: 3.57 kgf max.
- 2.6 Total unmating force: 0.71 kgf min.
- 2.7 Temperature range: -25°C~+85°C.

3. Finishes:

- 3.1 Contacts: Gold flashed 1U", 3U", 5U", 10U", 15U", 30U"
- 3.2 Shell: Nickel plated.

3	SHELL	1	C2680/K7	T=0.40±0.02mm	Nickel Plated	D3660XX-H
2	CONTACT	5	Phosphor Bronze	T=0.25±0.02mm	Gold Flashed	A3650XX
1	HOUSING	1	LCP		Black	JCH002
No.	Part Name	Q'ty	Material	Thickness	Finish	Notes

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION





ORDER INFORMATION

MSB-SWCR-5AB-LF
SERIES | REEL | MYLAR | 90°SMT | FEMALE
LEADFREE
5 PIN AB TYPE



DESCRIPTION: MINI-U.S.B 5P A B FEMALE S.M.T





○ 膠盤



○ 1000 pcs/盤

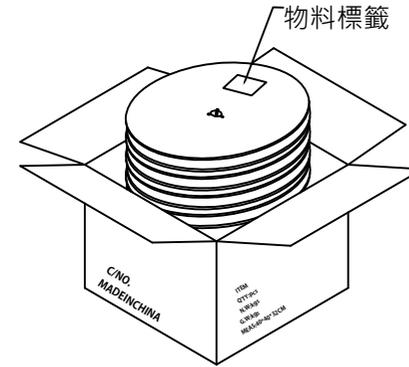


○ 10 盤/箱(10 Kpcs)

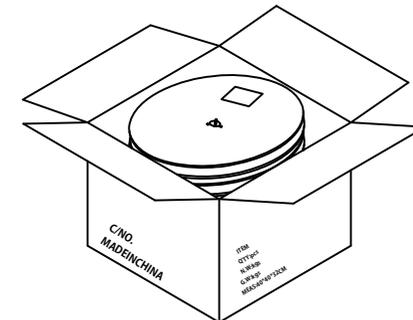



○ 每裝箱10盤,若尾數箱在空間處加裝填充物

外箱物料標籤



○ 依圖示粘貼產品或ROHS標籤



○ 外箱用透明膠帶封工字型



备注:

1. 胶盘规格: 380*28mm
2. 每盘装1.0K pcs;
3. 每箱装10盘(10K pcs);
4. 外箱尺寸: 长*宽*高: 39*39*32cm;
5. 外箱用透明胶纸带封"工"字型;
6. 依外箱图示位置粘贴好产品或ROHS标签.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 PLC ± 0.30
1 PLC ± 0.25
2 PLC ± 0.20
3 PLC ± 0.10
ANGULAR: ±5°



ORDER INFORMATION

MSB-SWCR-5AB-LF
SERIES | | | | LEADFREE
5 PIN AB TYPE
REEL
MYLAR
90°SMT
FEMALE

DESCRIPTION: MINI-U.S.B 5P A B FEMALE S.M.T