

● MATERIALS: (RoHS Compliant)




Housing: Plastic Thermoplastic  
P.B.T UL94V-0 Black  
Contacts: Phosphor Bronze Gold  
Selective Plated  
Front Shell: Steel Nickel Plated  
Over Copper

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp  
Dielectric Withstanding Voltage: 500V AC  
Insulation Resistance: >500MΩ/Min  
Contact Resistance: 35mΩ/Max  
Operation Temperature: -55°C ~ +85°C

PCB MOUNTING:

1.4mm (For PCB 1.6mm)

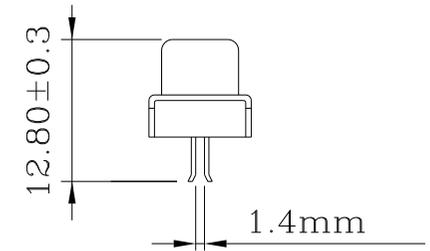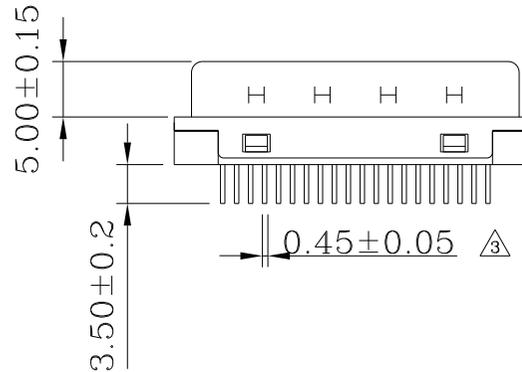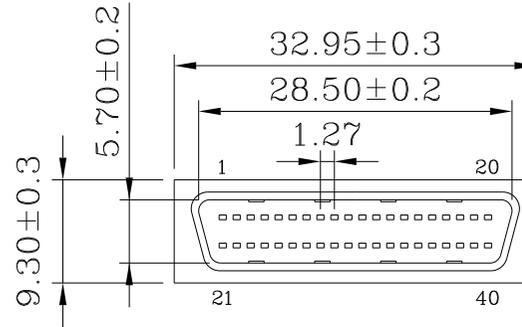

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°



ORDER INFORMATION

HPD-PE14-040-LF  
SERIES | LEADFREE  
40 WAY  
EDGE 1.4mm  
MALE

DESCRIPTION: 1.27mm (.050") Pin Type 40Pos Plug Connector Clip P.C.B Molded Type