
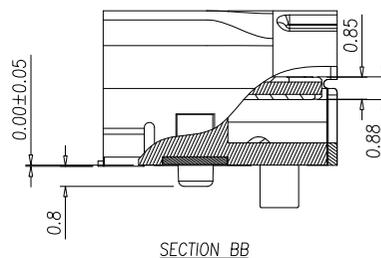



NOTE:

- 1.ELECTRICAL PROPERTIES:  
 1-1.CONTACT CURRENT RATING:1A AT 250V AC MIN.  
 1-2.CONTACT RESISTANCE:50m Ohm MAX  
 1-3.INSULATION RESISTANCE:100M Ohm MIN.  
 1-4.DIELECTRIC WITHSTANDING VOLTAGE:AC 100V/1 MINUTE.  
 2.MATERIAL:  
 2-1.TERMINAL:PHOSPHOR BRONZE(C5191R-H),T=0.20±0.015mm.  
 2-2.HOUSING:LCP  
 2-3.SHELL:MATERIAL: BRASS C2680 T=0.35±0.01.  
 2-3.:GROUND SHELL: BRASS C2680 T=0.3±0.01.  
 3.PLATING:  
 3-1.TERMINAL: GOLD 3u" MIN ON CONTACT AREA,  
 BRIGHT TIN 120u" MIN ON SOLDER TAILS,  
 UNDERPLATED NICKEL OVER ALL 50u" MIN.  
 3-2.SHELL: MATTED TIN 120u" MIN ON ALL AREA,  
 UNDERPLATED NICKEL OVER ALL 50u" MIN.  
 3-2.GROUND SHELL: NICKEL OVER ALL 50u" MIN.

PARTS LIST

NO.	DESCRIPTION	Q'TY
4	TERMINAL	8
3	GROUND SHELL	1
2	SHELL	1
1	HOUSING	1



RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

**MSB-SW-8B-LF**  
 SERIES | LEADFREE  
 8 PIN B TYPE  
 90°SMT  
 FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: