




NOTES:

1.MATERIAL

- 1.1 INSULATOR:PBT+30%GF BLACK
- 1.2 CONTACT:BRASS
- 1.3 CONTACT PLATING:GOLD/TIN PLATED
- 1.4 SHELL:SPCC, NICKEL PLATED
- 1.5 SCREW:BRASS,NICKEL PLATED

2.SPECIFICATION

- 2.1 CURRENT RATE:5AMPS
- 2.2 INSULATOR RESISTANCE:1000MΩ MIN,AT 500V DC
- 2.3 DIELECTRIC STRENGTH:1000V PER MINUTE
- 2.4 OPERATION TEMPERATURE:-55°C TO +105°C

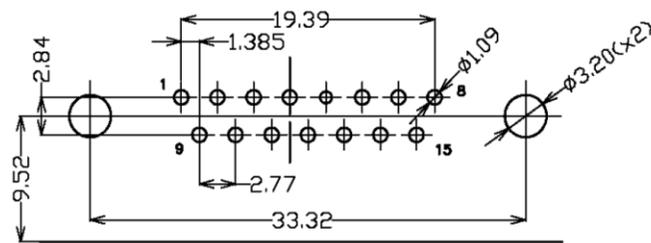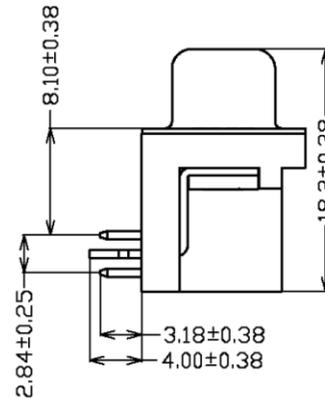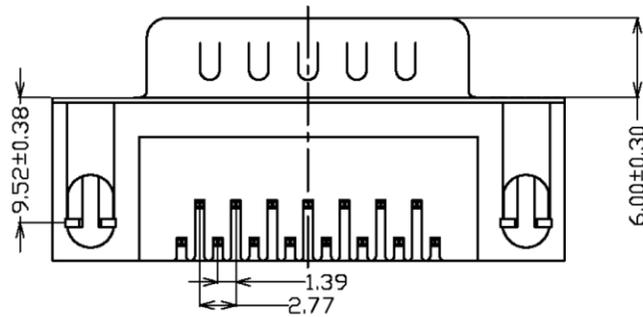

P.C.B. LAYOUT(TOLERANCE±0.05)  
TOP VIEW

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
.X ± 0.50  
.XX ± 0.30  
.XXX ± 0.15  
ANG ±



ORDER INFORMATION

DR-PSNH-15-LF  
SERIES | LEADFREE  
15 WAY  
HEX SCREW  
NUT  
SEMI GOLD  
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DR15公鉗附半金黑 8.1 RoHS