
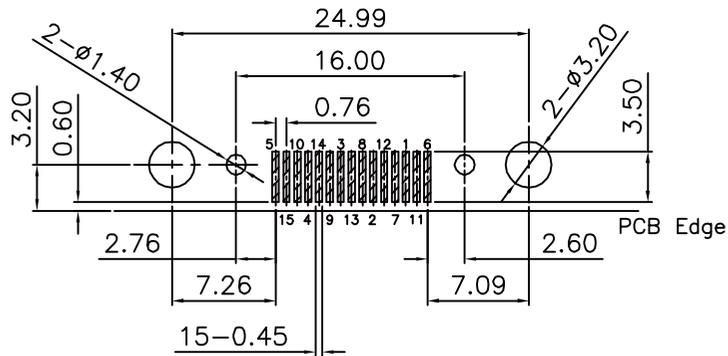
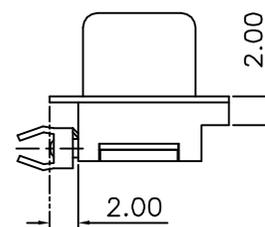


1. Material:  $\triangle E$   
 Contact: Copper Alloy  
 $\triangle F$  Insulator: LCP, UL94V-0, Black  
 Shell: SPCC  
 Harpoon: Copper Alloy.  
 Rivet: Copper Alloy  
 Screw: Brass

2. Specification:

- Contact Current Rating: 1 Amperes.  
 Dielectric Withstanding Voltage: AC 500V at sea level.  
 Insulation Resistance: 1000 Megohms Min.  
 Contact Resistance: 30 Milliohms Max.  
 Operation Temperature: -55°C to +105°C.

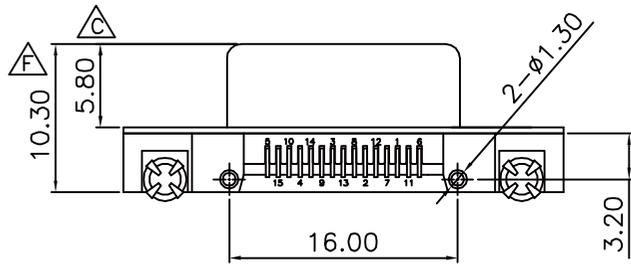

Recommended PCB Layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION  $\left[ \begin{array}{c} \text{---} \\ \text{---} \end{array} \right]$

X, ±  
 X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.05  
 ANG ±



ORDER INFORMATION

HDW-SNZ4-15-LF  
 SERIES | CLIP | LEADFREE  
 | | | 15 WAY  
 NUT  
 MALE

DESCRIPTION: '68%+6/0 60'

煜倫股份有限公司

www.morethanall.com