

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:




Current Rating: 1 AMP.

Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C .

***RoHS Compliant**

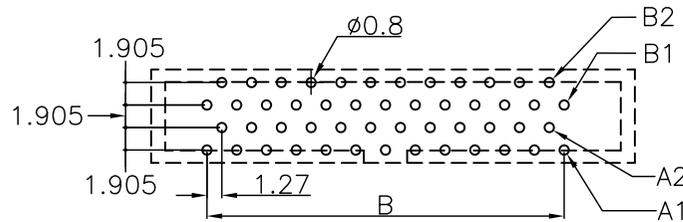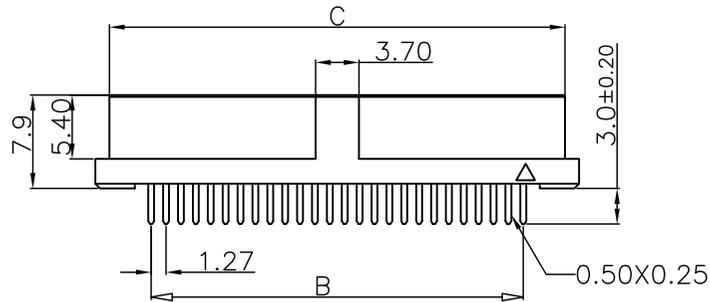

P.C. Board Layout Top View
(Tolerance: ±0.05)
(26,34,50 Position)

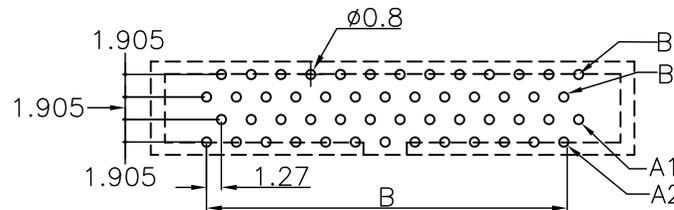

P.C. Board Layout Top View
(Tolerance: ±0.05)
(20,32,40,52,60,68,80,100 Position)

Dimension	20 Thru 100
Position	20 Thru 100
A	1.27xNo. of Positions/2+8.25
B	1.27xNo. of Positions/2-1.27
C	1.27xNo. of Positions/2+5.85

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

HF-D-xxx-LF
SERIES | LEADFREE
026~100 WAY
DIP 180°

DESCRIPTION: