
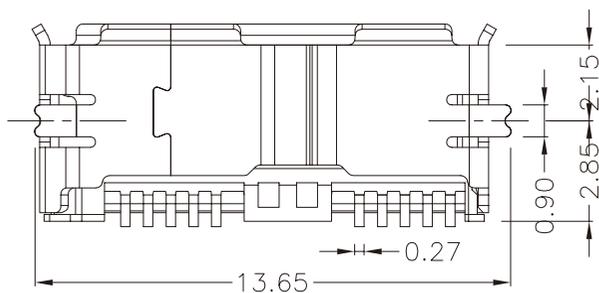



P.B.C LAYOUT
TOP VIEW ±0.05

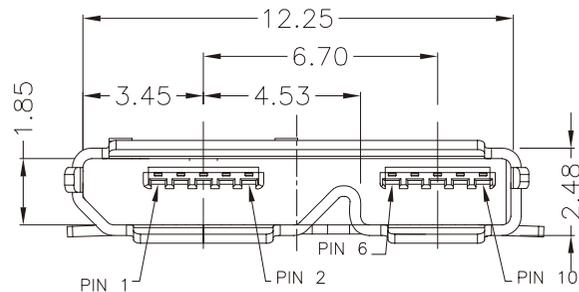

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: STAINLESS STEEL, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT/ mm SCALE 1:1

.XX ±


DATE

.XXX ±

SIZE A4

PPOJECTION

ANG ±



ORDER INFORMATION

MISB-SWE-10B-LF
SERIES | LEADFREE
10 PIN B TYPE
EAR
90°SMT
FEMALE

DESCRIPTION: MICRO USB 3.0 B TYPE, PCB MOUNT, SMT, METAL SHIELD

煜倫股份有限公司

www.morethanall.com