

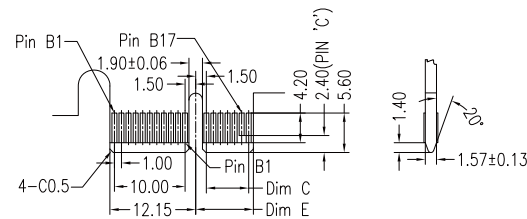

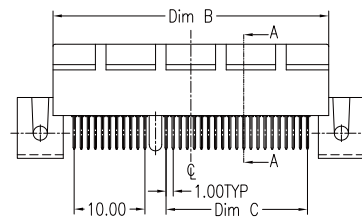






	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'	DIM 'E'	Pin'C'
36P	7.65	25.00	6.00	12.30	8.15	A1,B17
64P	21.65	39.00	20.00	26.30	22.15	A1,B17,B31
98P	38.65	56.00	37.00	43.30	39.15	A1,B17,B31,B48
164P	71.65	89.00	70.00	76.30	72.15	A1,B17,B31,B48,B81



I/O Panel direction  
Primary (Component) Side



I/O Panel direction  
Secondary (solder) Side

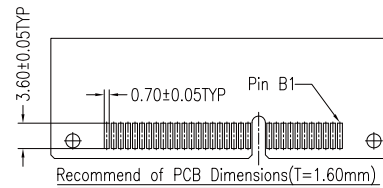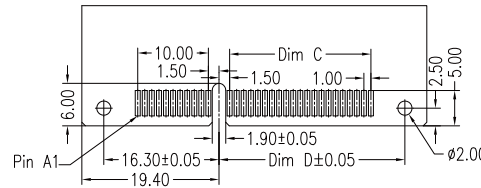

## NOTES:

### \*Material

Body : Nylon6T, UL 94V-0 Rated.

Color: Black

Contacts : Brass or Phosphor Bronze

Plating: Gold plating over Nickel on contact Area;

Tin plating on terminal.

### \*Mechanical

Insertion Force: 1.15N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 4.9N min per contact;

### \*Electrical Specification

Contact Resistance : 30 Milliohms Max.

Current Resistance : 1 Ampere

Insulation Resistance : 1000 Megohms Min, At 500V AC.

### \*Environmental

Operating Temperature : -55°C to +105°C

**RoHS Compliant**

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



**ORDER INFORMATION**

PCIX-EF2X-xxx-LF  
SERIES | LEADFREE  
036~164WAY  
NON FLANGE  
EDGE CLIP

DESCRIPTION: PCI Express Connector Strip Form Pin Straddle(With Flange type)