


PAKING: 10PCS/一把.

- NOTES:
 1.ELECTRICAL TEST:100% OPEN.SHORT & MISS WHRE TEST
 2.CONDUCTOR RESISTANCE:5.0HMS MAX.
 3.INSULATOR RESISTANCE:DC300V/0.01S500K OHM MIN.

NO.	SPECIFICATION STANDARD	QT'Y
③	RJ45 8P8C pin针镀金, 透明 带黑色护套	2
②	45P PVC MOLDING,COLOR : BLACK.	Kg/g
①	CAT. 5E UTP 24AWG*4P OD:5.5MM PVC JACKET, COLOR: BLACK.	1

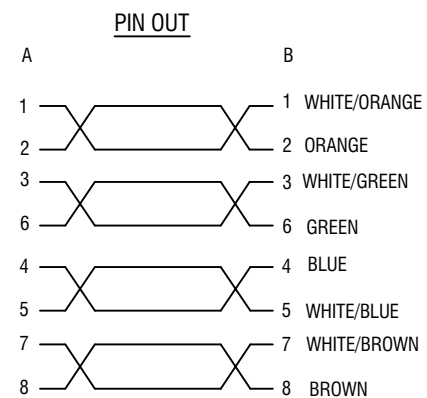

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

RJX2-08RL0824-Mxxx-LF
 SERIES | | | LEADFREE
 10C:100mm
 15C:150mm
 MALE TO MALE
 24 AWG
 8P 90° TO 8P 180°

DESCRIPTION: CAT. 5E UTP 雙頭加護套 CABLE BLACK L=150MM