
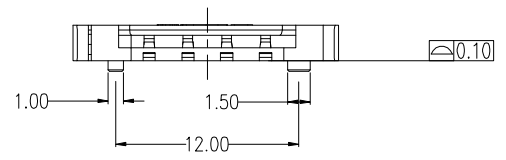


PCB LAYOUT RECOMMENDED

NOTES:

- *Material
Housing: LCP UL 94V-0, Color:Black;
Contact: Phosphor Bronze;
Plating: Au plating on contact area;
Sn (80u" Min.) plating on solder tail;
Ni (50u" Min.) underplating overall.
- *Mechanical
Durability: 3000 Cycles.
- *Specification:
Current Rating: 0.5A. 12V AC.;
Dielectric Withstanding Voltage: AC 500V For 1 Minute;
Insulation Resistance: 500M Ω Min.;
Contact Resistance: 100m Ω Max.;
- *Environmental
Operating Temperature: -20°C to +60°C;



Pin Number	Description
S1	Vcc(Voltage)
S2	Vcc(Reset)
S3	CLK
S4	Reserved
S5	GND
S6	Vpp
S7	I/O
S8	Reserved

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ± 0.45
X. ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG \pm

PJECTION



ORDER INFORMATION

SCV-W2523P-08-LF
SERIES | | | LEADFREE
| | | 08WAY
| | | WITH LOCATING PEG
| | | BODY HIGH 2.3mm
| | | PAD TO PAD 25.54mm
| | | 90°SMT

DESCRIPTION: Sim Card 8Pin With Post