


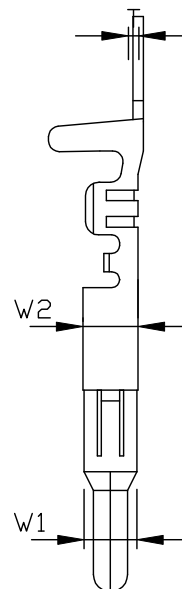



項目	規格
T	0.2 ± 0.03
L	17.90 ± 0.35
IS	3.30 ± 0.4
WS	2.0 ± 0.4
W	1.30 ± 0.07
W1	2.0 ± 0.1
W2	2.10 ± 0.1
W3	3.30 ± 0.25
W4	3.2 ± 0.2
E	4.90 ± 0.2
H8	2.0 ± 0.3
H9	3.40 ± 0.3

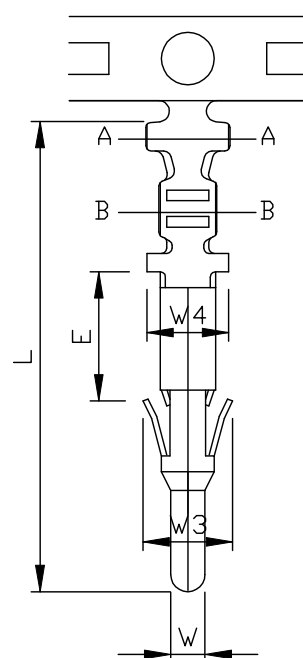

SECTION A-A



SECTION B-B

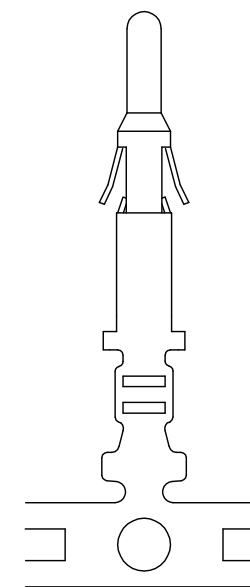

插入力 1.2 KG MAX

脫拔力 4.5 KG MIN

適用電線	線皮外徑	端子材質	包裝數量	重量	表面處理	連續, 單粒
22-18	1.3-2.7	BRASS. SH	7000 PCS	KG	TIN-Plated	BS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

EL-M-18-LF
SERIES | LEADFREE
18~22AWG
MALE TERMINAL

DESCRIPTION: