


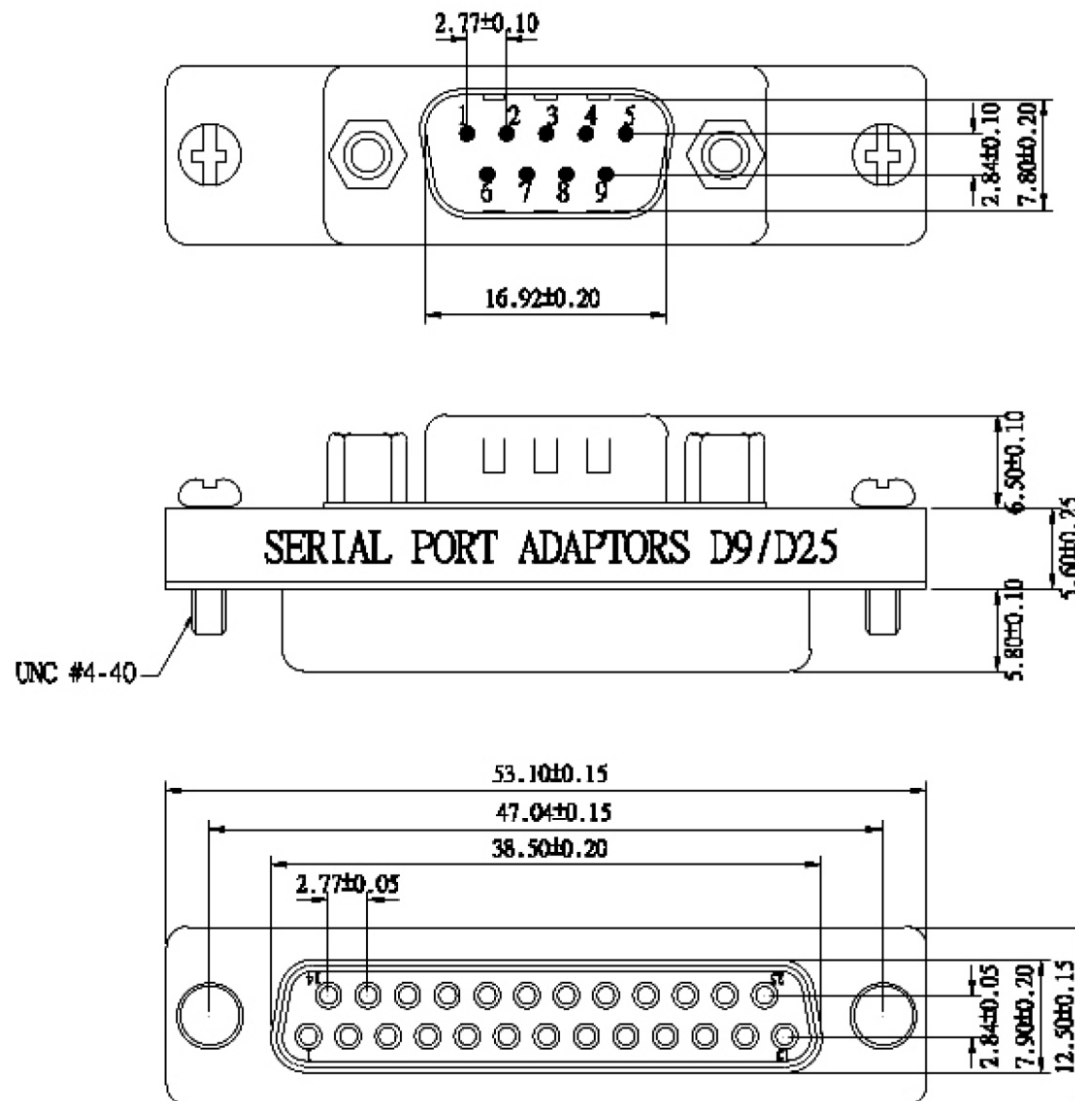

(DB9M/25F ADAPTOR)

PIN OUT: 09Male	25Female
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

Label: orange color with white character

One side: SERIAL PORT ADAPTORS D9/D25

The other side: MINI ADAPTER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell (Nickel Silver)

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 500V AC for one minute

INSULATOR RESISTANCE: 500MΩ min at 500V DC

TEMPERATURE: -25°C—+105°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

DBX2-ES-0925-LF

SERIES

LEADFREE

09 TO 25 WAY

MALE TO FEMALE

DESCRIPTION: