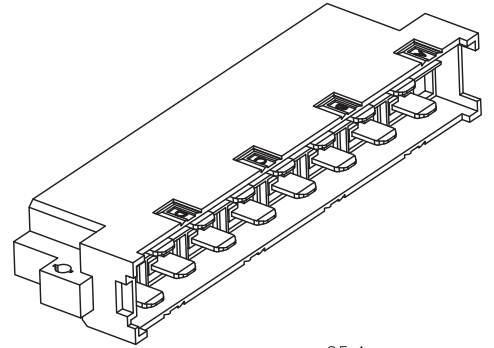
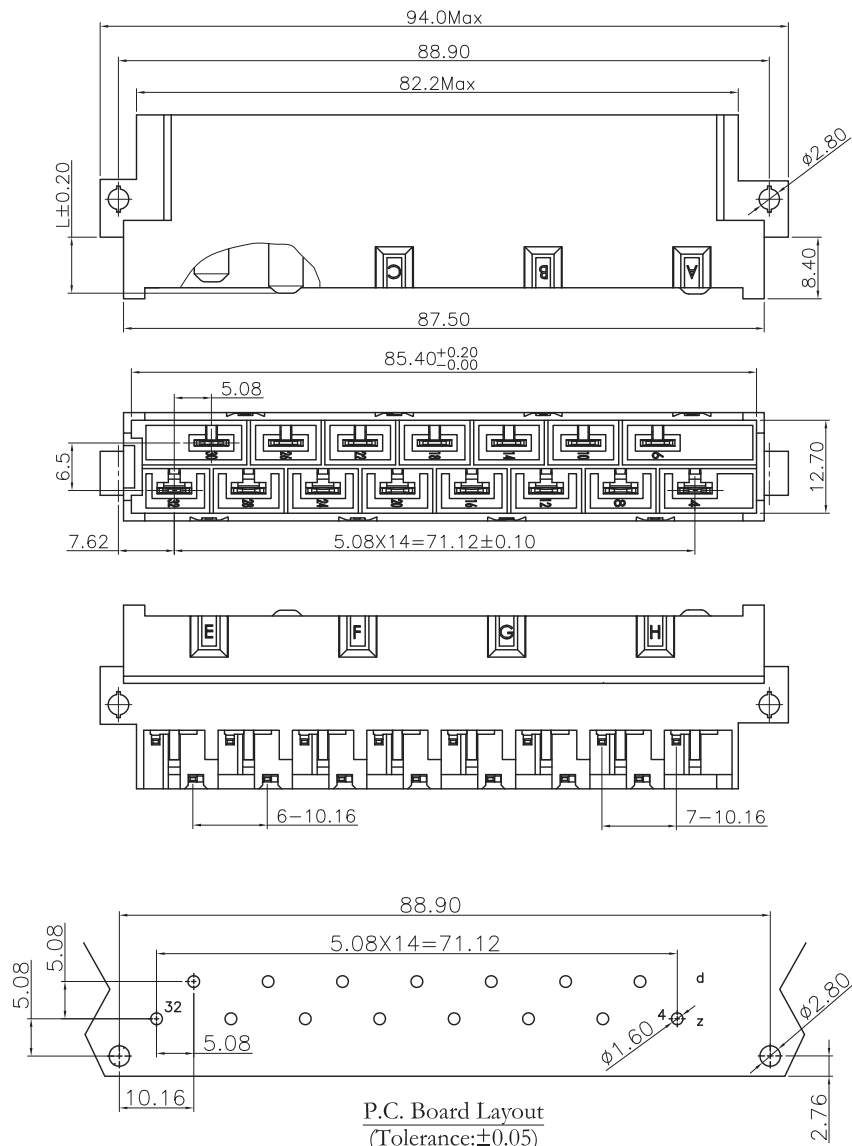


Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 15 AMP.

Dielectric Withstanding Voltage: AC 3100V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 8mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

*RoHS Compliant

Note: d26 Contact Length 7.65mm,

Other Pin Contact Length 6.00mm.

Dip Length 2.9mm.

CONTACT NO.	L
z4,z8,z12,z16,z20,z24,z28,z32	6.00
d6,d10,d14,d18,d22,d30	6.00
d26	7.65

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50


.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

UH-PRPM26-15-LF
SERIES | LEADFREE
15WAY
PREMATING #26
DIP 90°
MALE

DESCRIPTION: