



Contact arrangement View from termination side




Dimensions

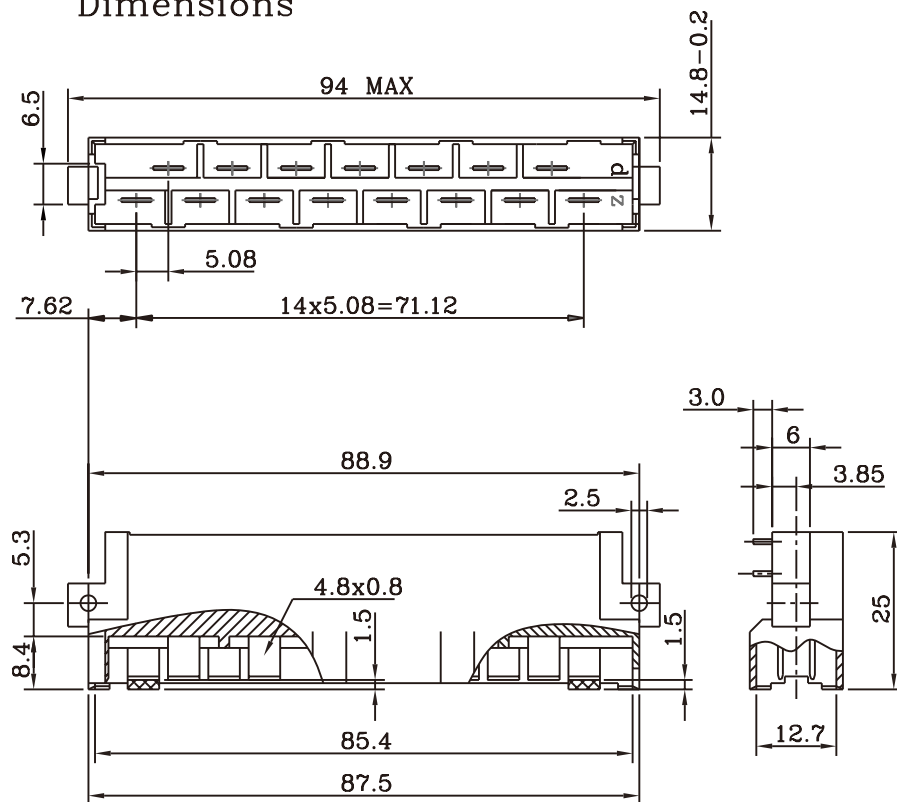

Technial data

Housing	PBT & 30%Class Fiber(UL94-0)
Contact	Male : Brass
Operating temperature	-55°C~+105°C
Contact resistance	8m(ohm)max.at DC 100mA
Insulator resistance	1000M(ohm)min.at DC 500V
Current rating	15 AMP
Withstanding voltage	AC 3100V for 1 minute
Insertion force	90N max
Withdrawal force	0.2N/pin min
Contact Rating	Ag Plating

Recommended P.C.B. layout

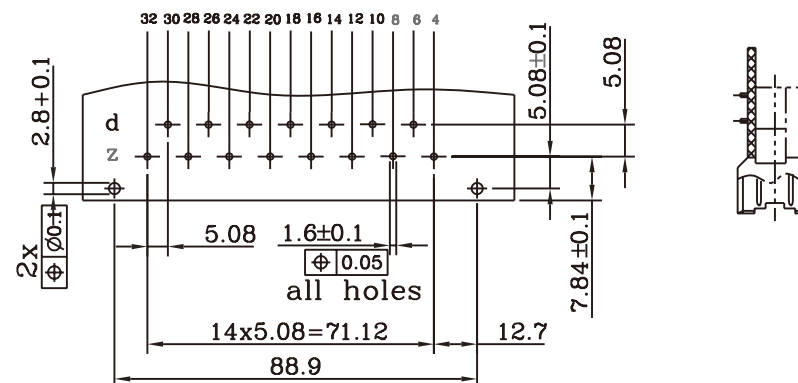

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

UH-PRPM-15-LF

SERIES
LEADFREE
15WAY
PREMATING
DIP 90°
MALE

DESCRIPTION: DIN 41612 EUROCARD CONNECTORS RIGHT ANGLE MALE TYPE