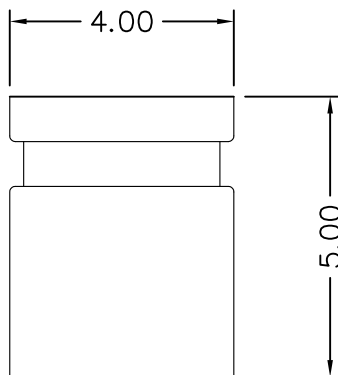


MATERIAL

Contact Pin : Phosphor bronze


SPECIFICATION

Current Rate : 2 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : 500V AC for one minute

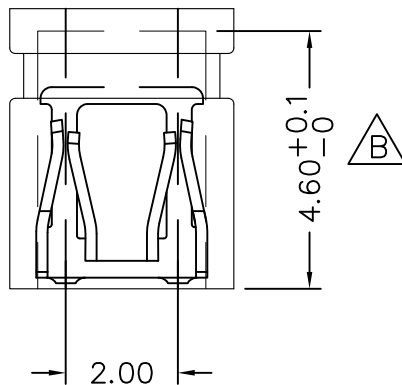

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION



ORDER INFORMATION

SJ-A-05-LF
SERIES | LEADFREE
HIGH 5.0mm
CLOSE

DESCRIPTION: MJ2.0 CLOSE H=5.0