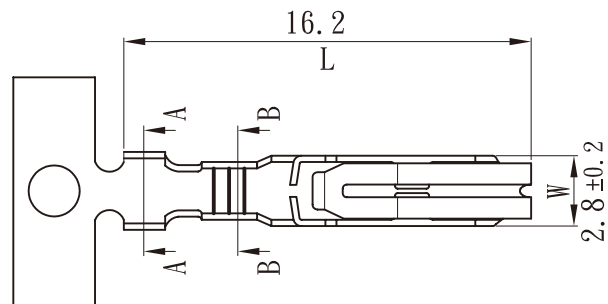




B-B Section

表面處理(Surface treatment):
鍍錫膜厚 40μ "以上
(Tin-plated thickness
more than 40μ ")

適用電線(Applicable wire):
AWG# 18~22

線皮外徑(Insulation O.D):
2.9~2.45 mm

包裝數量(Standard packing):
5000 PCS

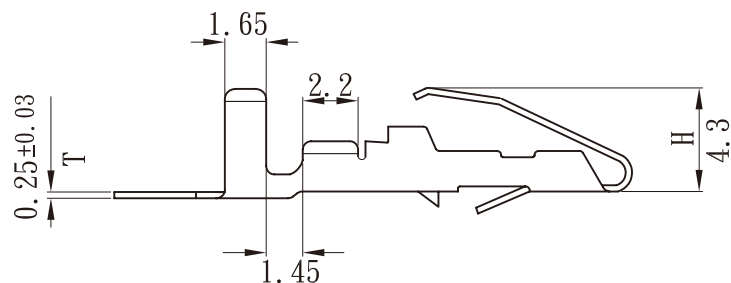

A-A Section

材質(Material): 磷青銅[Phosphor bronze]

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

KSL-T-18-LF	
SERIES	LEADFREE
18~22AWG	
TERMINAL	

DESCRIPTION: