


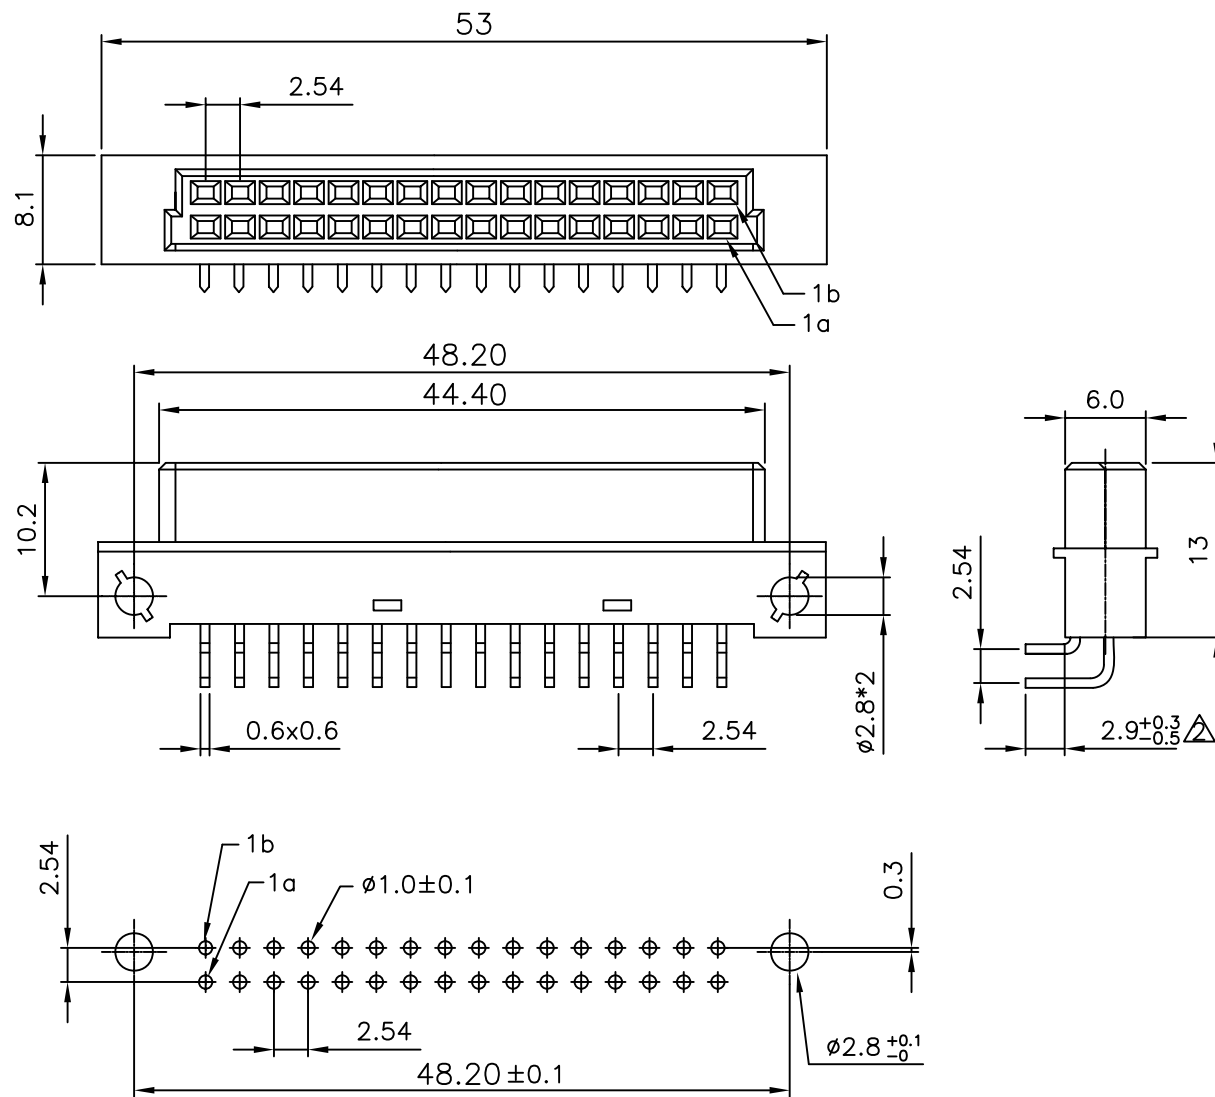

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

△ SPECIFICATION
MATERIAL
 Insulator: PBT, rated UL94V-0
 Contacts: Brass
 Shell: Steel
 Rivet, Boardlock: Copper alloy
CONTACT PLATING
 Underplate: 50m Nickel
 Contact area: 1m²~30m² Selective gold
 Solder tails area: 100m² Tin/Lead
ELECTRICAL
 Operation voltage: 250 VAC max.
 Current rating: 1 Amps max.
 Contact resistance: 20 mohms max.
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +125°C

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$



ORDER INFORMATION

UB-SR-2X16-LF
 SERIES | 32 WAY | LEADFREE
 DIP 90°
 FEMALE

DESCRIPTION: DIN 41612 (DUAL ROW) FEMALE 32PIN