


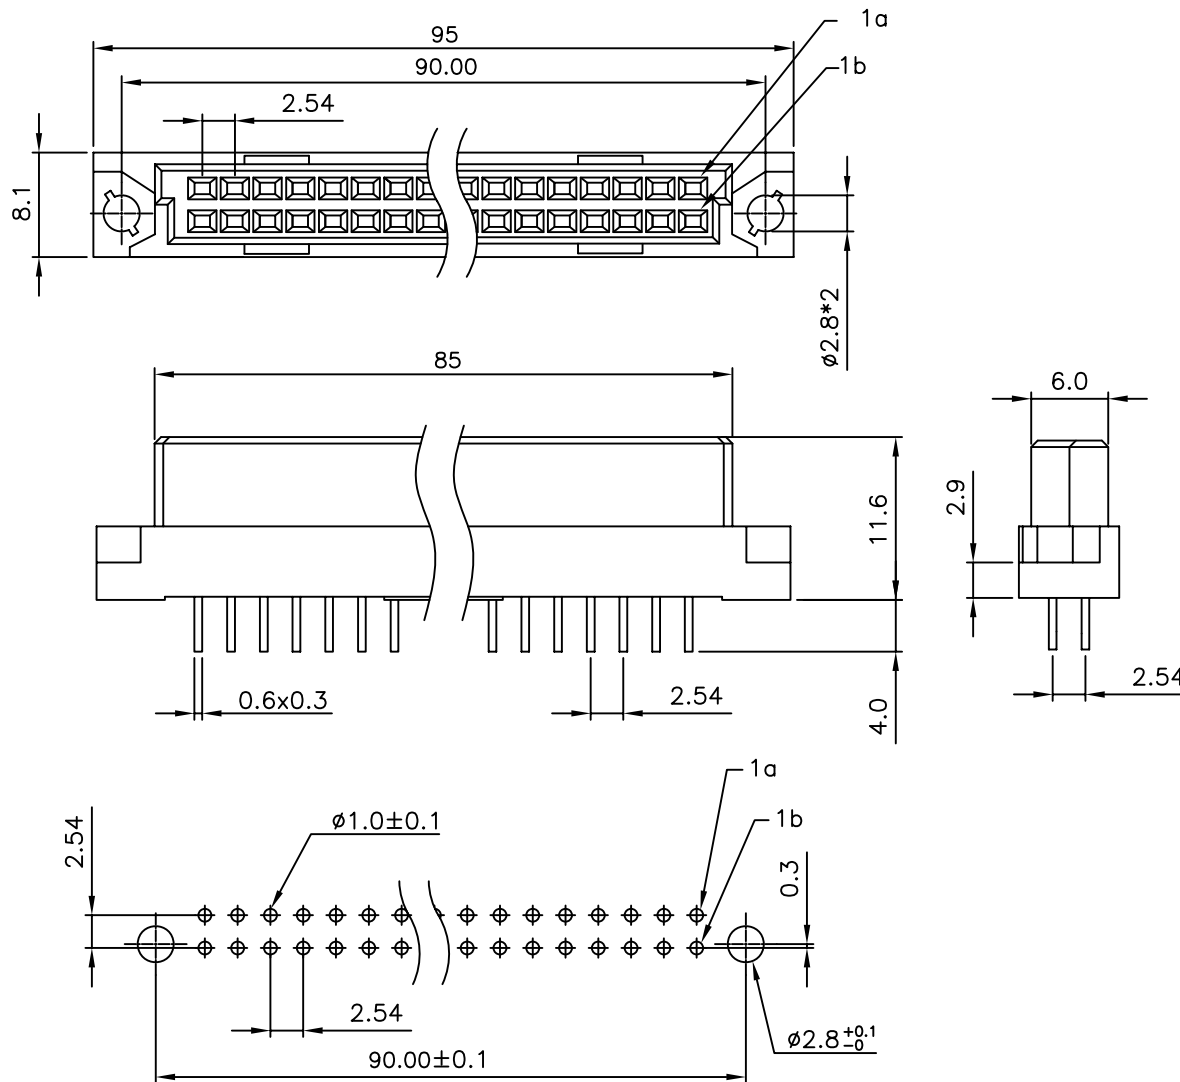

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

△ SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-0

Contacts: Phosphor Bronze

Rivet, Boardlock: Copper alloy

CONTACT PLATING

Underplate: 50m Nickel

Contact area: 1m²~30m² Selective gold

Solder tails area: 100m² Tin/Lead

ELECTRICAL

Operation voltage: 250 VAC max.

Current rating: 1 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55°C TO +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±



ORDER INFORMATION

UB-SD-2X32-LF
SERIES | LEADFREE
64 WAY
DIP 180°
FEMALE

DESCRIPTION: DIN 41612 (DUAL ROW) FEMALE 64PIN