

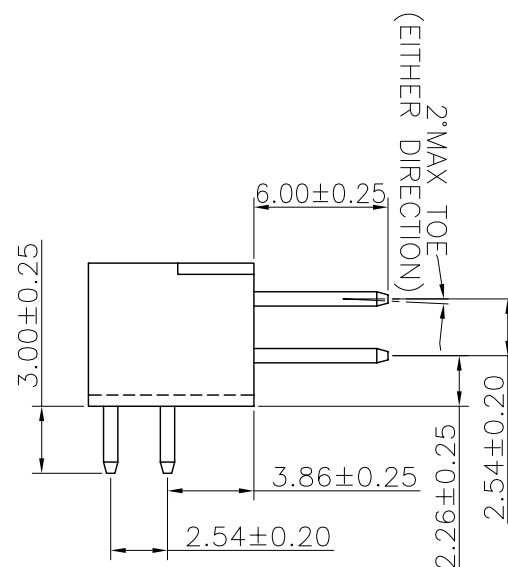


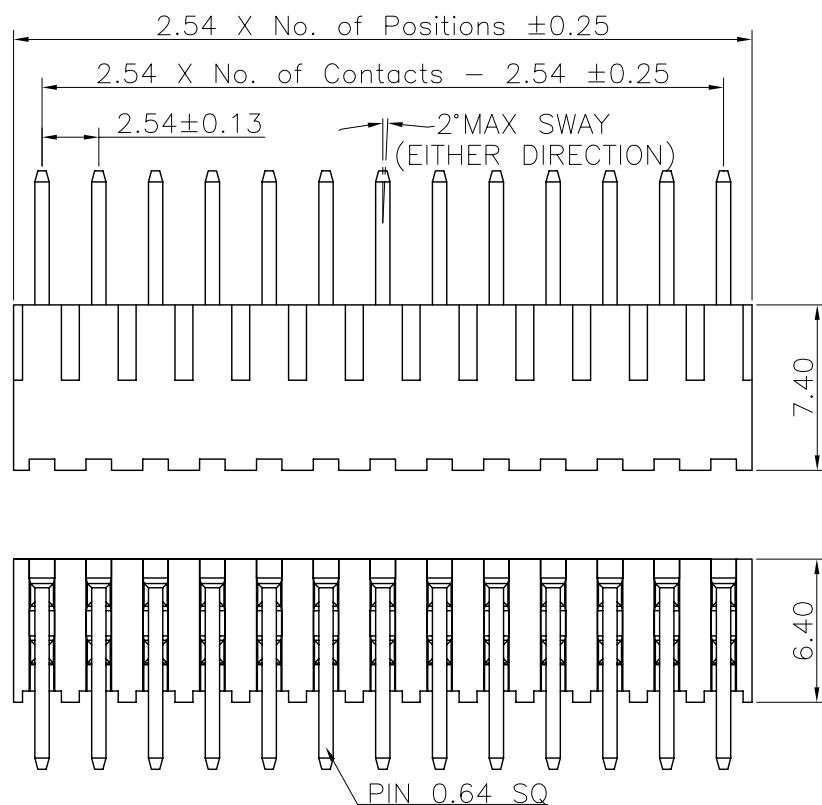

Recommended P.C.Board
Layout
(Tolerance:±0.05)



Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material: Brass
Insulator Material:Thermoplastic, UL 94V-0
PBT or the equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±



ORDER INFORMATION

T-R74-xx-LF
SERIES LEADFREE
02~40 WAY
LONG 7.4mm
DIP 90°

DESCRIPTION: 2.54 PIN HEADER DUAL ROWS R/A TYPE BASE 6.40H