


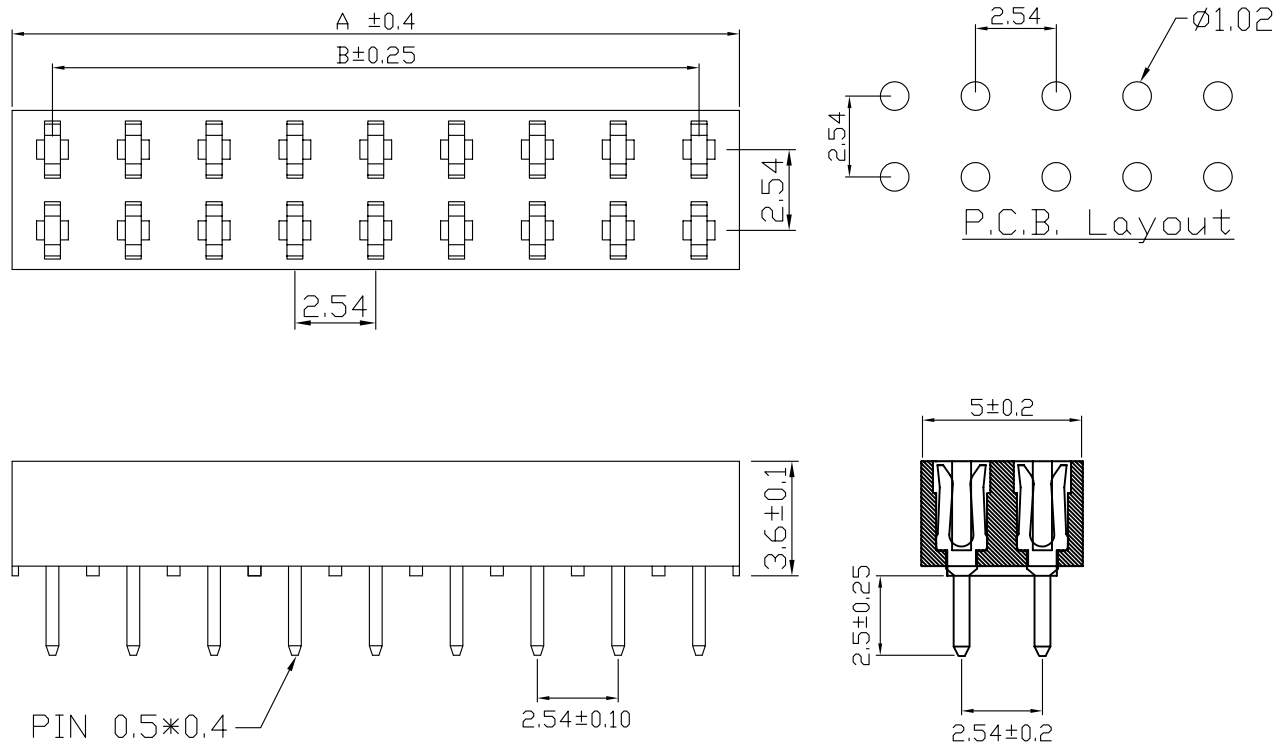

SPECIFICATION

Current Rating : 3 Amp
 Insulator Resistance : 5000 Megohms min.
 Contact Resistance : 20 Milliohms Max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : PA66
 Contact Plated : Full Gold, Full Tin, Selective Plated
 Standard : Gold Flash all Over Nickel

NO.OF PINS	DIMENSIONS	
	A	B
2*2P	5.28	2.54
2*3P	7.82	5.08
2*4P	10.36	7.62
2*5P	12.9	10.16
2*6P	15.44	12.7
2*7P	17.98	15.24
2*8P	20.52	17.78
2*9P	23.06	20.32
2*10P	25.6	22.86
2*11P	28.14	25.4
2*12P	30.68	27.94
2*13P	33.22	30.48
2*14P	35.76	33.02
2*15P	38.3	35.56
2*16P	40.84	38.1
2*17P	43.38	40.64
2*18P	45.92	43.18
2*19P	48.46	45.72
2*20P	51	48.26
2*21P	53.54	50.8
2*22P	56.08	53.34
2*23P	58.62	55.88
2*24P	61.16	58.42
2*25P	63.7	60.96
2*26P	66.24	63.5
2*27P	68.78	66.04
2*28P	71.32	68.58
2*29P	73.86	71.12
2*30P	76.4	73.66
2*31P	78.94	76.2
2*32P	81.48	78.74
2*33P	84.02	81.28
2*34P	86.56	83.82
2*35P	89.1	86.36
2*36P	91.64	88.9
2*37P	94.18	91.44
2*38P	96.72	93.98
2*39P	99.26	96.52
2*40P	101.8	99.06

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

F-D36-2Xxx-LF
 SERIES | LEADFREE
 2X02:04 WAY
 2X40:80 WAY
 HIGH 3.6mm
 DIP 180°

DESCRIPTION: FEMALE HEADER 2.54mm 3.6mm, DUAL ROW, Straight Type