

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.



Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M min. at DC 500V.

Contact Resistance: 30m max. at DC 100mA.

Operating Temperature: -55°C ~+105°C .

***RoHS Compliant**

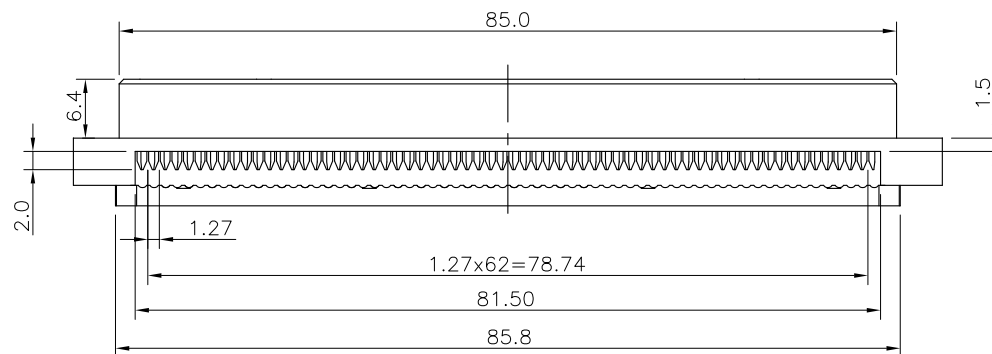

2.54mm	64	a - c	
Pitch	Pin No.	Rows With Contacts	Contact Arrange

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

UC-SF-2X32-LF
SERIES | LEADFREE
IDC 64 WAY
FEMALE

DESCRIPTION: