
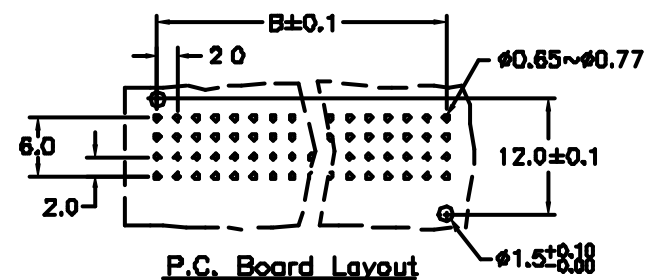
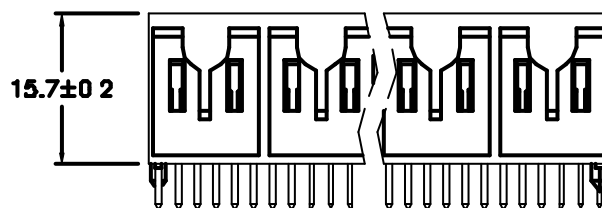


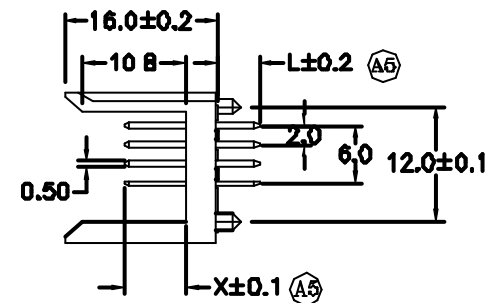
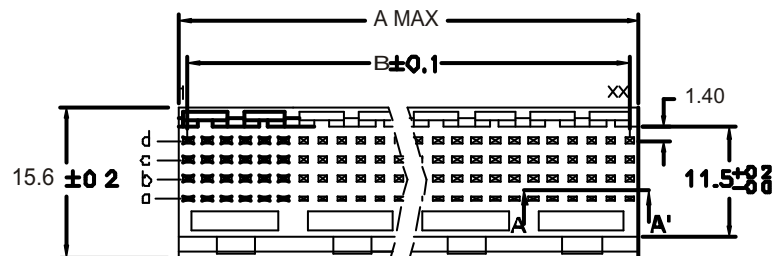


L	X	Position	Dimension	
			A	B
4.3	5.0			
	5.75	24	11.95	10
	6.5	48	23.95	22
	7.25	72	35.95	34
	8.0	96	47.95	46
13.6	5.0	120	59.95	58
	5.75	144	71.95	70
	6.5	168	83.95	82
	7.25	192	95.95	94
	8.0			
17.0	5.0			
	5.75			
	6.5			
	7.25			
	8.0			



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FUB-PDxxyy-4Xxx-LF

SERIES	MALE	DIP 180°	50:5.00mm 57:5.75mm 65:6.50mm 72:7.25mm 80:8.00mm	LEADFREE	4X06:24WAY 4X48:192WAY
--------	------	----------	---	----------	---------------------------

DESCRIPTION: